

Installed Audio Surface Mount Speakers

Control HST



Wide coverage on-wall loudspeaker with Hemispherical Soundfield Technology. One CMMD diaphragm with 1" voice coil, and two splayed CMMD tweeters. 70/100V transformer with taps at 60W, 30W and 15W (plus 7.5W 70V only) and 8-ohm direct. Maximum SPL: 108 dB (peaks of 114 dB). Frequency response (± 3 dB) 68 Hz – 18 kHz. Coverage pattern of 180x160 degrees. IP54 rated for indoor/outdoor use. Available in black or white.

Control HST	JBL1658	RRP: £500.00
Control HST-WH	JBL1659	RRP: £500.00

Control 20 Series

Control 23-1

Ultra-compact indoor/outdoor background/foreground loudspeaker. 3" woofer with woven fibreglass cone. 0.5" PEI diaphragm tweeter with liquid cooling. Contemporary, high-design appearance. Built-in InvisiBall® mounting hardware. Weather resistant enclosure and transducers. Wide 100° x 100° coverage. 50 Watt power handling (100 Watt program) in direct 8 setting, plus built-in 15 Watt 70V/100V multi-tap transformer. High fidelity sound character with broad frequency response of 70 Hz – 20 kHz. Available in black or white.



Control 23-1	JBL1732	RRP: £220.00
Control 23-1-WH	JBL1733	RRP: £220.00

Control 23-1L

Specifications as per the Control 23-1 but without the 70/100v transformer (8 ohm input only).



Control 23-1L	JBL1782	RRP: £205.00
Control 23-1L-WH	JBL1783	RRP: £205.00

Control 25-1

Compact indoor/outdoor background/foreground loudspeaker. 5 3/4" woofer with woven fibreglass cone. 3/4" PEI diaphragm tweeter with liquid cooling. Contemporary, high-design appearance. Built-in InvisiBall® mounting hardware. Weather resistant enclosure and transducers. Wide 100° x 100° coverage. 100 Watt power handling (200 Watt program) in direct 8 setting, plus built-in 30 Watt 70V/100V multi-tap transformer. High fidelity sound character with broad frequency response of 60 Hz – 20 kHz. Available in black or white.



Control 25-1	JBL1734	RRP: £295.00
Control 25-1-WH	JBL1735	RRP: £295.00

Control 25-1L

Specifications as per the Control 25-1 but without the 70/100v transformer (8 ohm input only)



Control 25-1L	JBL1784	RRP: £260.00
Control 25-1L-WH	JBL1785	RRP: £260.00

Control 25AV

5.5" two-way shielded wall-mounted speaker. Weather resistant indoor/outdoor steel grille. InvisiBall® installation system. 100W continuous, 8 and 70/100V transformer with taps at 60W, 30W and 15W (plus 7.5W at 70V only). 87dB SPL. 100°x100° coverage. Includes MTC-PC sealed-entrance panel cover. Black or white. Priced as each, sold in pairs.



Control 25AV	JBL0103	RRP: £320.00
Control 25AV-WH	JBL0104	RRP: £320.00

Control 25AV-LS

Compact Indoor Outdoor Background Foreground Loudspeaker for Life Safety Applications. The Control® 25AV-LS built on the same platform as our popular Control 25AV and is UL 1480 UUMW Listed for use in fire alarm and/or emergency communication systems. This loudspeaker is EN 54-24 Compliant for life safety applications.



Control 25AV-LS	JBL0934	RRP: £365.00
Control 25AV-LS-WH	JBL0935	RRP: £365.00

Control 28-1

High output indoor/outdoor background/foreground loudspeaker. 8" woofer with woven fibreglass cone. 1" PEI diaphragm tweeter with fluid cooling. Contemporary, high-design appearance. Built-in InvisiBall® mounting hardware. Weather resistant enclosure and transducers. Wide 100° x 100° coverage. 120 Watt power handling (240 Watt program) in direct 8 setting, plus built-in 60 Watt 70V/100V multi-tap transformer. High fidelity sound character with broad frequency response of 45 Hz – 20 kHz. Available in black or white.



Control 28-1	JBL1736	RRP: £470.00
Control 28-1-WH	JBL1737	RRP: £470.00

Control 28-1L

Specifications as per the Control 28-1 but without the 70/100v transformer (8 ohm input only)



Control 28-1L	JBL1786	RRP: £445.00
Control 28-1L-WH	JBL1787	RRP: £445.00

Control 29AV-1

High output 8" indoor/outdoor speaker. 150W continuous power, 8ohms, 90dB sensitivity. 70/100V transformer with taps at 110W, 55W and 28W (plus 14W at 70V only). 110°x85° coverage with rotatable horn. Invisiball® installation system plus ten M6 suspension points. Kevlar cone woofer and titanium compression driver. Includes SonicGuard overload protection and MTC-PC2 sealed entrance panel cover. Black or White.



Control 29AV-1	JBL0628	RRP: £735.00
Control 29AV-WH-1	JBL0632	RRP: £735.00

Control 30

10" high output indoor/outdoor speaker 38Hz-17kHz frequency response. 250W continuous power, 8 ohms plus 70/100V transformer with taps at 150W, 75W and 38W (plus 19W at 70V only). 93dB sensitivity. 120°x110° coverage. Invisiball® installation system plus ten M6 suspension points and optional U-bracket. Includes SonicGuard overload protection. Black or White.



Control 30	JBL0116	RRP: £1,250.00
Control 30-WH	JBL0117	RRP: £1,250.00

Control 31

Two-Way, high output indoor-outdoor monitor loudspeaker with 10" LF and 2414H-C compression driver. Extended bandwidth, extremely smooth response. Outdoor capability to IP-55. 33 Hz – 19 kHz. 250 Watts, 92 dB sensitivity. Included InvisiBall® hardware plus ten 6 mm attachment points for suspension and optional U-bracket. Includes 70V/100V line transformer with taps at 150W, 75W, and 38W, plus 8 ohm bypass position. Available in black and white.



Control 31	JBL1660	RRP: £1,120.00
Control 31-WH	JBL1661	RRP: £1,120.00

Control SB2210

Dual 10" compact subwoofer. Provides low frequency reinforcement for a wide variety of sound system applications. Its compact size, high output and outdoor capable design makes it one of the most versatile subwoofers in the installation market. 2 x 10" woven fiberglass cone LF drivers. 500 Watts power rating (cont pink noise). Frequency response down to 38Hz. 13 M6 insert points Including Inserts for optional U-Bracket. Compact, low profile design. Available in black or white.



Control SB2210	JBL1738	RRP: £1,160.00
Control SB2210-WH	JBL1739	RRP: £1,160.00

Accessories

MTC-23UB-1

U-bracket for Control 23-1 and Control 23-1L. Black or white.

MTC-23UB-1	JBL1740	RRP: £35.00
MTC-23UB-1-WH	JBL1741	RRP: £35.00

MTC-25UB-1

U-bracket for Control 25. Black or white.

MTC-25UB-1	JBL1742	RRP: £50.00
MTC-25UB-1-WH	JBL1743	RRP: £50.00

MTC-28UB-1

U-bracket for Control 28. Black or white.

MTC-28UB-1	JBL1744	RRP: £60.00
MTC-28UB-1-WH	JBL1745	RRP: £60.00

MTC-23WMG-1

WeatherMax grille for Control 23-1 and Control 23-1L loudspeakers. Available in black or white.

MTC-23WMG-1	JBL1746	RRP: £45.00
MTC-23WMG-1-WH	JBL1747	RRP: £45.00

MTC-25WMG-1

Weathermax grille for Control 25-1 and Control 25-1L loudspeakers. Black or white.

MTC-25WMG-1	JBL1748	RRP: £60.00
MTC-25WMG-1-WH	JBL1749	RRP: £60.00

MTC-28WMG-1		
Weathermax grille for Control 28-1 and Control 28-1L loudspeakers. Black or white.		
MTC-28WMG-1	JBL1750	RRP: £85.00
MTC-28WMG-1-WH	JBL1751	RRP: £85.00

MTC-PC3		
Panel cover. Liquid-tight seal for input terminals, also functions as strain relief. Fits Control 23-1, 25-1, 28-1, SB2210, 25AV, 29AV, 30, 31, 1, 5, CBT 70J-1, 70JE-1, 200LA-1, 100LA-1, 50LA-1. Plus older models Control 23, 23T, 25, 25T, 28, 28T-60		
MTC-PC3	JBL1752	RRP: £40.00

MTC-SBT300		
MTC-SBT300 70/100v Transformer		
MTC-SBT300	JBL1766	RRP: £150.00

MTC-23CM		
Ceiling mount adaptor for Control 23. Black or white. Priced individually, sold in pairs.		
MTC-23CM	JBL0179	RRP: £25.00
MTC-23CM-WH	JBL0180	RRP: £25.00

MTC-25WMG		
WeatherMax grille for Control 25 models. Available in black or white.		
MTC-25WMG	JBL0195	RRP: £65.00
MTC-25WMG-WH	JBL0196	RRP: £65.00

MTC-28/25CM		
Ceiling mount adaptor for Control 25 and Control 28. Available in black or white. Priced individually, sold in pairs.		
MTC-28/25CM	JBL0200	RRP: £45.00
MTC-28/25CM-WH	JBL0201	RRP: £45.00

MTC-29MK		
Marine Kit for Control 29AV-1. Consists of aluminium grille with Weathermax coating and stainless steel screws. Available in black or white.		
MTC-29MK	JBL1828	RRP: £310.00
MTC-29MK-WH	JBL1829	RRP: £310.00

MTC-29CM		
Ceiling mount adaptor for Control 29 and Control 31 loudspeakers. Available in black or white.		
MTC-29CM	JBL0209	RRP: £40.00
MTC-29CM-WH	JBL0210	RRP: £40.00

MTC-29UB		
U-bracket for Control 29 and Control 31. Black or white.		
MTC-29UB	JBL0211	RRP: £120.00
MTC-29UB-WH	JBL0212	RRP: £120.00

MTC-30CM		
Ceiling mount bracket for Control 30. Available in black or white.		
MTC-30CM	JBL0213	RRP: £50.00
MTC-30CM-WH	JBL0214	RRP: £50.00

MTC-30MK		
Marine grille kit for the Control 30. Consists of grille, new seals, and stainless steel screws.		
MTC-30MK-WH	JBL1268	RRP: £215.00


MTC-30UB		
U-bracket for Control 30 loudspeakers. Available in black or white.		
MTC-30UB	JBL0215	RRP: £120.00
MTC-30UB-WH	JBL0216	RRP: £120.00


MTC-PC2		
Panel cover. Liquid-tight seal for input terminals, also functions as strain relief. Fits all surface-mounted models. Pack of two pieces.		
MTC-PC2	JBL0782	RRP: £35.00

MTC-SB2W		
Wall/corner bracket for Control SB2 subwoofer.		
MTC-SB2W	JBL0170	RRP: £190.00

MTC-210UB		
U-bracket for Control 210 subwoofer. Available in black or white.		
MTC-210UB	JBL0177	RRP: £140.00
MTC-210UB-WH	JBL0178	RRP: £140.00

SLP Series

SLP12/T		
The SLP12/T full-range on-wall loudspeaker provides superior sound and broad, consistent coverage in a sleek, low-profile enclosure, with a powerful 75mm (3-inch) driver that delivers the legendary sound that JBL is known for.		
SLP12/T-BK	JBL2129	RRP: £170.00
SLP12/T-WH	JBL2130	RRP: £170.00

SLP14/T		
The SLP14/T two-way on-wall loudspeaker provides rich, detailed wide-range sound and broad, consistent coverage in a sleek, low-profile enclosure, thanks to a coaxial 4-inch driver complement that delivers the legendary sound that JBL is known for.		
SLP14/T-BK	JBL2131	RRP: £240.00
SLP14/T-WH	JBL2132	RRP: £240.00

Control 50 Series Sub/Sat

Control 52

Satellite speaker for use with Control 50S/T or Control 40CS/T subwoofers. 2.5" low-distortion driver. 25W continuous, 16. 82dB sensitivity. Wall mount bracket included. White. Priced individually, sold as pairs.



Control 52	JBL0880	RRP: £105.00
Control 52-WH	JBL0881	RRP: £105.00

Control 50S/T

Compact surface-mount subwoofer. 8" long-throw woofer. 100W continuous, 8 thru/bypass mode. 89dB sensitivity. Selectable 70/100V or low impedance input. Built-in crossover network, drives 2 or 4 satellite speakers. Wall mount bracket included. White.



Control 50S/T	JBL0878	RRP: £590.00
Control 50S/T-WH	JBL0879	RRP: £590.00

Control 50 Pack

Subwoofer/satellite system, consisting of 1x Control 50S/T and 4x Control 52. White.



Control 50 PACK	JBL0882	RRP: £960.00
Control 50 PACK-WH	JBL0883	RRP: £960.00

Control 1 Pro

Control 1 Pro

Two-way compact monitor. 150W continuous, 4. 87dB sensitivity. 5.25" low frequency driver, 1/4" HF driver. Professional drivers and crossover network. Magnetically shielded. SonicGuard overload protection. Black or white. Priced individually, but sold in pairs only.



Control 1 Pro	JBL0721	RRP: £110.00
Control 1 Pro-WH	JBL0722	RRP: £110.00

Control 2P Powered

Control 2P (Pair)

Compact Powered Reference Monitors. Ideal for desktop recording, video production, AV presentations, broadcast applications and monitoring of electronic musical instruments. 5.25" driver and 1/4" dome tweeter. 2x35W amplifier. XLR, jack and phono inputs. Volume control, headphone jack and HF contour control. Master speaker also available separately.



Control 2PS	JBL0796	RRP: £390.00
-------------	---------	--------------

Control 2P (Master Only)

Compact Powered Reference Monitor. Ideal for desktop recording, video production, AV presentations, broadcast applications and monitoring of electronic musical instruments. 5.25" driver and 1/4" dome tweeter. 2x35W amplifier. XLR, jack and phono inputs. Volume control, headphone jack and HF contour control. Master speaker only.

Control 2PM	JBL0797	RRP: £335.00
-------------	---------	--------------

MTC-2P

Wall mount kit for Control 2P.

MTC-2P	JBL0798	RRP: £40.00
--------	---------	-------------

Control 5

Control 5

Compact two-way loudspeaker. 6.5" LF driver, 1" titanium dome tweeter. 175W continuous, 4. 89dB sensitivity. Moulded enclosure, shielded magnet. Black.



Control 5	JBL0118	RRP: £370.00
-----------	---------	--------------

Control CRV Series

Control CRV



Unique contemporary curved design, combinable into 180°, 270° or 360° round arc clusters. Selectable 70/100V or 4 ohm. 80Hz-20kHz frequency response. 75W continuous. 89dB sensitivity. 105° horizontal, 80° vertical. Indoor/outdoor capable (IP34). Wall mount bracket included. Black or White.

Control CRV	JBL0884	RRP: £395.00
Control CRV-WH	JBL0885	RRP: £395.00

Accessories

PMB


The JBL Control PMB Pole-Mount Bracket allows a configuration of four Control CRV loudspeakers in a 360-degree pattern, and is compatible with a variety of general-purpose ceiling-fan-pole assemblies available from many manufacturers. Available in black or white.





PMB-BK	JBL0886	RRP: £65.00
PMB-WH	JBL0887	RRP: £90.00


Ceiling Speakers

CSS Commercial Series Speakers

CSS8004		
Affordable ceiling loudspeaker for paging and background music applications. 4" speaker. High 90dB sensitivity. 5 W multi-tap transformer for 100V, 70V and 25V distributed lines. Very wide 175° coverage. Fits CCS-BB4 backcan.		
CSS8004	JBL1098	RRP: £30.00

CSS8008		
Affordable ceiling loudspeaker for paging and background music applications. 8" speaker. High 96dB sensitivity. 5 W multi-tap transformer for 100V, 70V and 25V distributed lines. 120° conical coverage. Fits CCS-BB8 backcan.		
CSS8008	JBL1099	RRP: £40.00

CSS8018		
Affordable high output ceiling loudspeaker for paging and background music applications. 8" speaker. Very high 97dB sensitivity. 10 W multi-tap transformer for 100V, 70V and 25V distributed lines. 110° conical coverage. Fits CCS-BB8 backcan.		
CSS8018	JBL1100	RRP: £55.00


CSS-15C-VA		
Full-range, EN54-24 certified ceiling speaker. 5" full-range dual-cone driver, torsion-mounted into an included easy-install blind-mount metal fire dome. The speaker is designed to provide clear and intelligible sound for applications requiring EN54 certification and/or BS5839 compliance. 6W, 3W and 1.5W multi-tap transformer for use on 100V distributed speaker lines. Frequency range (-10dB) 180Hz – 20kHz. 120° conical coverage.		
CSS-15C-VA	JBL1715	RRP: £90.00


Accessories


CSS-BB4x6		
4" backcan for CSS8004. Zinc-plated, power-coated steel.		
CSS-BB4X6	JBL1101	RRP: £95.00

CSS-BB8x6		
8" backcan for CSS8008 and CSS8018. Zinc-plated, power-coated steel.		
CSS-BB8X6	JBL1102	RRP: £150.00

8100 Series

8124		
4" open-backed ceiling speaker. 70/100V transformer with taps at 6W, 3W, 1.5W (plus 0.75W at 70V only). 93dB sensitivity, 60Hz-18kHz frequency response for non-plenum applications. 130° coverage. Priced as each, sold in packages of four pieces.		
8124	JBL0784	RRP: £60.00

8128		
8" open-backed ceiling speaker. 70/100V transformer with taps at 6W, 3W, 1.5W (plus 0.75W at 70V only). 97dB sensitivity, 50Hz-16kHz frequency response for non-plenum applications. Priced as each, sold in packages of four pieces. 8" open-backed ceiling speaker. 70/100V transformer with taps at 6W, 3W, 1.5W (plus 0.75W at 70V only). 97dB sensitivity, 50Hz-16kHz frequency response for non-plenum applications. 90° coverage. Priced as each, sold in packages of four pieces.		
8128	JBL0783	RRP: £80.00

8138		
8" ceiling speaker for pre-install backcan. 70/100V transformer with taps at 6W, 3W, 1.5W (plus 0.75W at 70V only). 97dB sensitivity, 90Hz-18kHz frequency response. 90° coverage. Priced as each, sold in packages of four pieces.		
8138	JBL0888	RRP: £85.00

Accessories

MTC-81BB8		
Pre-install backcan for 8138. 7.4 litre volume. Priced as each, sold in packages of four pieces.		
MTC-81BB8	JBL0889	RRP: £55.00

MTC-81TB8		
Tile bridge for 8138. 19 gauge steel with e-coated finish. Priced as each, sold in packages of four pieces.		
MTC-81TB8	JBL0890	RRP: £30.00

MTC-8124C		
C-ring for 8124. With integral clips for optional tile rails. Sold in quantities of four pieces		
MTC-8124C	JBL0793	RRP: £25.00

MTC-8128C		
C-ring for 8128. With integral clips for optional tile rails. Sold in quantities of four pieces.		
MTC-8128C	JBL0794	RRP: £25.00

MTC-RAIL		
Tile rail for 8124 and 8128.		
MTC-RAIL	JBL0795	RRP: £20.00

Control 10 Series

Control 12C/T

Full-range ceiling speaker consisting of a 3" wide-bandwidth cone driver mounted in a vented, paintable baffle with a preattached blind-mount backcan for quick and easy installation. Dual conduit/cable clamps. Combined 70V/100V and low impedance direct operation. 20 Watts at 8 ohm nominal setting. 15W multi-tap at 70V/100V. 68 Hz – 17 kHz bandwidth with wide 130° coverage. White or black (-BK). Price individually, packaged in pairs.



CONTROL 12C/T	JBL1345	RRP: £125.00
CONTROL 12C/T-BK	JBL1346	RRP: £125.00

Control 12C-VA

Control 12C-VA is a full-range, EN54-24 certified ceiling speaker consisting of a 3" full-range driver mounted in a vented, paintable baffle made of UV resistant UL94-V0 and UL94-5VB flammability-rated material, with a pre-attached blind-mount back-can for quick and easy installation. Combined 70V/100V and low impedance direct operation. 20 Watts at 8 nominal setting. 15W multi-tap at 70V/100V. 68Hz – 70kHz bandwidth with 130° coverage.



CONTROL 12C-VA	JBL1712	RRP: £135.00
----------------	---------	--------------

Control 14C/T

Full-range ceiling speaker with a 4 " high tech cone driver and a 19 mm soft-dome liquid cooled tweeter mounted in a vented, paintable baffle with a pre-attached blind-mount backcan for quick and easy installation. Dual conduit/cable clamps. Combined 70V/100V and low impedance direct operation. 30 Watts at 8 ohm nominal setting. 25W multi-tap at 70V/100V. 74 Hz – 20 kHz bandwidth with wide 120° coverage. White or black (-BK). Price individually, packaged in pairs.



CONTROL 14C/T	JBL1347	RRP: £175.00
CONTROL 14C/T-BK	JBL1348	RRP: £175.00

Control 14C-VA

Control 14C-VA is a full-range, EN54-24 certified ceiling speaker consisting of a 100 mm (4 inch) high tech cone driver and a 19 mm soft-dome liquid cooled tweeter mounted in a vented, paintable baffle made of UV resistant UL94-V0 and UL94-5VB flammability-rated material, with a pre-attached blind-mount back-can for quick and easy installation. Combined 70V/100V and low impedance direct operation. 30 Watts at 8 nominal setting. 25W multi-tap at 70V/100V. 74Hz – 20 kHz bandwidth with 120° coverage.



CONTROL 14C-VA	JBL1713	RRP: £185.00
----------------	---------	--------------

Control 16C/T

Full-range ceiling speaker with a 6.5" high tech cone driver and a 19 mm soft-dome liquid cooled tweeter mounted in a vented, paintable baffle with a pre-attached blind-mount backcan for quick and easy installation. Dual conduit/cable clamps. Combined 70V/100V and low impedance direct operation. 50 Watts at 8 ohm nominal setting. 30W multi-tap at 70V/100V. 62 Hz – 20 kHz bandwidth with wide 110° coverage. High 91 dB sensitivity for high maximum SPL. White or black (-BK). Price individually, package



CONTROL 16C/T	JBL1349	RRP: £225.00
CONTROL 16C/T-BK	JBL1350	RRP: £225.00

Control 16C-VA

Control 16C-VA is a full-range, EN54-24 certified ceiling speaker consisting of a 6.5" high tech cone driver and a 19 mm soft-dome liquid cooled tweeter mounted in a vented, paintable baffle made of UV resistant UL94-V0 and UL94-5VB flammability-rated material, with a pre-attached blind-mount back-can for quick and easy installation. Combined 70V/100V and low impedance direct operation. 50 Watts at 8 nominal setting. 30W multi-tap at 70V/100V. 62Hz – 20 kHz bandwidth with 110° coverage.



CONTROL 16C-VA	JBL1714	RRP: £235.00
----------------	---------	--------------

Control 18C/T

Control 18C/T is a full-range ceiling speaker consisting of a 200 mm (8.0 inch) high tech cone driver and a 25 mm soft-dome liquid cooled tweeter mounted in a vented, paintable baffle made of UV resistant UL94-V0 and UL94-5HB material, with a pre-attached blind-mount backcan for quick and easy installation.



CONTROL 18C/T	JBL1789	RRP: £310.00
CONTROL 18C/T-BK	JBL1804	RRP: £310.00

MTC-14WG

Weather Grille Accessory for Control 12C/T and 14C/T. Aluminum, powder-coated, passed B117 salt-spray 200 hours, UV 100 hours. Priced individually, packed in pairs. Available in black and white

MTC-14WG	JBL1623	RRP: £30.00
MTC-14WG-BK	JBL1625	RRP: £30.00

MTC-16WG

Weather Grille Accessory for Control 16C/T. Aluminum, powder-coated, passed B117 salt-spray 200 hours, UV 100 hours. Priced individually, packed in pairs. Available in black and white

MTC-16WG	JBL1624	RRP: £35.00
MTC-16WG-BK	JBL1626	RRP: £35.00

Control 20 Series

Control 24C

4" two-way vented ceiling speaker. 80Hz-20kHz, 86dB sensitivity. 40W continuous, 16. SonicGuard overload protection. 130° coverage. With backcan, grille, support plate and tile rails. Priced as each, sold as pairs. Optional new construction bracket (MTC-24NC), mud plaster ring bracket (MTC-24MR) and trim ring for retrofit in 250mm cutouts (MTC-24TR)



CONTROL 24C JBL0097 RRP: £200.00

Control 24CT

4" two-way vented ceiling speaker. 80Hz-20kHz, 86dB sensitivity. 40W continuous, 16 ohm plus transformer for 70V or 100V line. Taps at 30W, 15W and 7.5W. SonicGuard overload protection. 130° coverage. With backcan, grille, support plate and tile rails. Priced as each, sold as pairs. Optional new construction bracket (MTC-24NC), mud plaster ring bracket (MTC-24MR) and trim ring for retrofit in 250mm cutouts (MTC-24TR). Black or White.



CONTROL 24CT JBL0099 RRP: £240.00
C24CT-BK JBL0933 RRP: £215.00

Control 24C Micro

4" two-way ceiling speaker. 15W continuous, 8. 86dB sensitivity. Extremely wide 150° coverage. With backcan, grille, support plate and tile rails. Priced as each, sold as pairs.



CONTROL 24C MICRO JBL0098 RRP: £130.00

Control 24CT Micro

4" two-way ceiling speaker. 15W continuous, 8 plus transformer for 70V or 100V line. Taps at 9W, 4W, 2W and 1W. 86dB sensitivity. Extremely wide 150° coverage. With backcan, grille, support plate and tile rails. Priced as each, sold as pairs.



CONTROL 24CT MICRO JBL0100 RRP: £140.00

Control 24CT Micro Plus

4.5" 2-way ceiling speaker. Complete assembly with backcan, grille, support plate and tile rails. 70/100V transformer taps at 25W and 12.5W. 85dB sensitivity. 150° coverage. 100mm depth. Priced as each, sold as pairs.



C24CT MICROPLUS JBL0780 RRP: £195.00

Control 26C

6.5" two-way ceiling speaker. 75Hz-20kHz, 89dB sensitivity. 150W program, 75W pink noise capacity. SonicGuard overload protection. 16 ohms. 110° conical coverage. With backcan, grille, support plate and tile rails. Priced as each, sold as pairs. Optional new construction bracket (MTC-26NC), mud plaster ring bracket (MTC-26MR) and trim ring for retrofit in 250mm cutouts (MTC-26TR).



CONTROL 26C JBL0108 RRP: £255.00

Control 26CT

6.5" two-way ceiling speaker. 75Hz-20kHz, 89dB sensitivity. 150W program, 75W pink noise capacity. Transformer for 70V or 100V line with taps at 60W, 30W and 15W. 16 ohms. 110° conical coverage. With backcan, grille, support plate and tile rails. Priced as each, sold as pairs. Optional new construction bracket (MTC-26NC), mud plaster ring bracket (MTC-26MR) and trim ring for retrofit in 250mm cutouts (MTC-26TR).



CONTROL 26CT JBL0109 RRP: £285.00

Control26-DT

6.5" Ceiling Loudspeaker Transducer Assembly designed for 200 mm (8") drivers.



CONTROL 26-DT JBL0107 RRP: £185.00

Control 26CT-LS

6.5" two-way ceiling speaker. 75Hz-20kHz, 89dB sensitivity. 150W program, 75W pink noise capacity. Transformer for 70V or 100V line with taps at 60W, 30W and 15W. 16 ohms. 110° conical coverage. With backcan, grille, support plate and tile rails. Priced as each, sold as pairs. Optional new construction bracket (MTC-26NC), mud plaster ring bracket (MTC-26MR) and trim ring for retrofit in 250mm cutouts (MTC-26TR). UL1480 listed for use in Fire Alarm and/or Emergency Communications systems.




C26CT-LS JBL1148 RRP: £320.00

Control 19CS

8" ceiling subwoofer. Nested chamber design. Linear aperture port. 42Hz-200Hz. 100W continuous, 8. 95dB SPL sensitivity. 180° coverage. SonicGuard overload protection. With backcan, support plate and rails. Priced as each, sold as pairs. Optional new construction bracket (MTC-19NC) and mud plaster ring bracket (MTC-19MR).



CONTROL 19CS JBL0091 RRP: £380.00

Control 19CST		
8" ceiling subwoofer. Nested chamber design. Linear aperture port. 42Hz-200Hz. Transformer for 70V or 100V line. Taps at 60W, 30W and 15W. No SonicGuard. Priced as each, sold as pairs. 200W program, 100W pink noise capacity. SonicGuard overload protection. With backcan, support plate and rails. Priced as each, sold as pairs.		
	JBL0092	RRP: £415.00

Accessories

MTC-19MR		
Optional mud (plaster) ring construction bracket for Control 19CS, Control 19CST, and Control 226C/T.		
MTC-19MR	JBL0172	RRP: £350.00

MTC-24MR		
Optional mud (plaster) ring construction bracket for Control 24C, Control 24CT, Control 24C Micro, Control 24CT Micro, and Control 24CT Micro Plus.		
MTC-24MR	JBL0187	RRP: £200.00

MTC-26MR		
Optional mud (plaster) ring construction bracket for Control 26C and Control 26CT.		
MTC-26MR	JBL0197	RRP: £250.00

MTC-19NC		
Optional new construction bracket for Control 19CS, Control 19CST, Control 226C/T, MTC-300BB8 and MTC-200BB6. Installs before plasterboard as cutout template.		
MTC-19NC	JBL0173	RRP: £250.00


MTC-24NC		
Optional new construction bracket for Control 24C, 24CT, 24C Micro, 24CT Micro, and 24CT Micro Plus. Installs before plasterboard as cutout template.		
MTC-24NC	JBL0188	RRP: £155.00


MTC-26NC		
Optional new construction bracket for Control 26C and Control 26CT. Installs before plasterboard as cutout template.		
MTC-26NC	JBL0198	RRP: £175.00


MTC-24TR		
Trim ring for retrofit installations of Control 24 into cutouts up to 10" diameter. White.		
MTC-24TR	JBL0189	RRP: £220.00

MTC-26TR		
Trim ring for retrofit installations of Control 26 into cutouts up to 10" diameter. White.		
MTC-26TR	JBL0199	RRP: £220.00


Control 40 Series

Control 42C		
Ultra-compact satellite speaker for use with Control 40 CS/T subwoofer. 160Hz-20kHz. 160° conical coverage. 82dB sensitivity. 30W continuous, 16. C-ring and tile rails optional. Priced as each, sold as pairs. Optional new construction bracket (MTC-42NC), mud plaster ring bracket (MTC-42MR)		
	JBL0788	RRP: £140.00

Control 45C/T		
Two-way 5.25" coaxial ceiling loudspeaker designed for applications that can benefit from extremely wide bandwidth and very consistent coverage from a ceiling speaker with a small footprint. 120° broadband pattern control featuring JBL's Radiation Boundary Integrator® (RBI™) technology. Bass extension down to 55 Hz. 8 ohm and 70V/100V operation. Integrated backcan for easy "blind-mount" install. Packaged with grille and tile rails for easy installation.		
	JBL1629	RRP: £390.00

Control 47C/T		
Wide coverage, extended bass ceiling speaker featuring conical RBI technology. 6.5" two-way. 120° consistent coverage. 50Hz-20kHz. 150W continuous, 8. 91dB sensitivity. 70/100V taps at 60W, 30W and 15W. 68Hz-20kHz. Priced as each, sold as pairs. Optional new construction bracket (MTC-47NC), mud plaster ring bracket (MTC-47MR)		
	JBL0785	RRP: £465.00

Control 47LP		
Wide coverage, extended bass ceiling speaker featuring conical RBI technology. 6.5" two-way. 120° consistent coverage. 50Hz-20kHz. 150W continuous, 8. 91dB sensitivity. 70/100V taps at 60W, 30W and 15W. Low profile at 142mm deep. 68Hz-20kHz. Priced as each, sold as pairs. Optional new construction bracket (MTC-47NC), mud plaster ring bracket (MTC-47MR)		
	JBL0786	RRP: £400.00

Control 47HC		
High ceiling, narrow coverage speaker featuring conical RBI technology. Specs as Control 47C/T-PL above but with 75° coverage. 55Hz-20kHz. 93dB sensitivity. Priced as each, sold as pairs.		
	JBL0787	RRP: £560.00

Control 40CS/T		
Direct radiating in-ceiling subwoofer. Long throw 8" driver. 30Hz-280Hz. 200W continuous, 8. 89dB sensitivity. 70/100V transformer with taps at 60W, 30W and 15W. Built-in crossover network with outputs for 2 or 4 Control 42C satellite speakers. Priced as each, sold as pairs.		
CONTROL 40CS/T	JBL0789	RRP: £650.00



Control 227C		
6.5" coax ceiling speaker with HF driver. Half depth design. 120° coverage. 150W continuous at 8. 90dB sensitivity. Coaxial design with kevlar reinforced 6.5" woofer and 1" compression driver. Extraordinary clarity for speech and vocals. Integrated backcan with clean contemporary grille sold separately.		
CONTROL 227C	JBL0730	RRP: £440.00



Accessories


MTC-47MR		
Mud ring for Control 47 models		
MTC-47MR	JBL1271	RRP: £375.00

MTC-47NC		
New construction ring for Control 47 models		
MTC-47NC	JBL1272	RRP: £270.00

MTC-42MR		
Mud ring for Control 42		
MTC-42MR	JBL1269	RRP: £230.00

MTC-42NC		
New construction ring for Control 42		
MTC-42NC	JBL1270	RRP: £170.00

LCT Ceiling Tile Speakers


JBL-LCT-81C/TM		
		
LCT-81C/MT	JBL2065	RRP: £200.00

Control 200 Series

Control 226C/T		
6.5" coax ceiling speaker. 120° coverage. 150W continuous. 47Hz-19kHz frequency response. 90dB sensitivity. 1" exit compression driver. 8 ohms plus 70/100V transformer with taps at 60W, 30W and 15W. 13" rounded ported baffle. Priced as each, sold as pairs.		
CONTROL 226C/T	JBL0728	RRP: £550.00



Control 227CT		
6.5" coax ceiling speaker with HF driver. Half depth design. 120° coverage. 150W continuous at 8. 70/100V transformer with 60W tap. 90dB sensitivity. Coaxial design with kevlar reinforced 6.5" woofer and 1" compression driver. Extraordinary clarity for speech and vocals. Integrated backcan with clean contemporary grille sold separately.		
CONTROL 227CT	JBL0731	RRP: £500.00



Accessories

MTC-200BB6		
Cylindrical backcan for Control 227 C & C/T. 16 gauge metal construction lined with 12mm MDF.		
MTC-200BB6	JBL0734	RRP: £100.00

MTC-TB6/8		
Tile bridge for suspended ceiling install.		
MTC-TB6/8	JBL0733	RRP: £40.00

MTC-SG6/8		
Square grille for Control 328 and Control 227		
MTC-SG6/8	JBL1275	RRP: £75.00


Control 300 Series


Control 328C		
8" coax ceiling speaker with 12" waveguide. 100° coverage. 250W power handling. 45Hz-to 18kHz frequency response. 93dB sensitivity. 2412H compression driver. 11.8" rounded ported baffle/waveguide, 6.4" deep. Depth 8.8".		
CONTROL 328C	JBL0643	RRP: £525.00





Control 328CT		
8" coax ceiling speaker with 12" waveguide. 100° coverage. 250W power handling. 45Hz-to 18kHz frequency response. 93dB sensitivity. 2412H compression driver. 11.8" rounded ported baffle/waveguide, 6.4" deep. 70/100V multi-tap transformer. Taps at 60W, 30W and 15W (plus 7.5.5W at 70V only). Depth 8.8".		
CONTROL 328CT	JBL0644	RRP: £590.00




Control 321C		
12" premium coax ceiling speaker. 90° coverage. 250W power handling. 34Hz-to18kHz frequency response. 94dB sensitivity. 2124H compression driver. 14.3" square ported baffle, 9" deep. EZ-Rail for ease of installation.		
		
CONTROL 321C	JBL0639	RRP: £650.00

Control 321CT		
12" premium coax ceiling speaker. 90° coverage. 250W power handling. 70/100V multi-tap transformer. Taps at 60W, 30W and 15W (plus 7.5W at 70V only). 34Hz-to18kHz frequency response. 94dB sensitivity. 2124H compression driver. 14.3" square ported baffle, 9" deep. EZ-Rail for ease of installation.		
		
CONTROL 321CT	JBL0640	RRP: £715.00

Control 322C		
12" ceiling speaker with medium format compression driver. 90° coverage. 400W power handling. 32Hz-to 20kHz frequency response. 95dB sensitivity. 2407H compression driver. 14.3" square ported baffle, 9" deep. EZ-Rail for ease of installation.		
		
CONTROL 322C	JBL0641	RRP: £945.00

Control 322CT		
12" ceiling speaker with medium format compression driver. 90° coverage. 400W power handling. 32Hz-to 20kHz frequency response. 95dB sensitivity. 2407H compression driver. 14.3" square ported baffle, 9" deep. EZ-Rail for ease of installation. 70/100V multi-tap transformer. Taps at 100W, 50W and 25W (plus 12.5W at 70V only).		
		
CONTROL 322CT	JBL0642	RRP: £1,025.00

Control 312CS		
12" ceiling subwoofer. 400W power handling. 30Hz-to 4.5kHz frequency response. 92dB sensitivity. 14.3" square ported baffle, 9" deep. EZ-Rail for ease of installation.		
		
CONTROL 312CS	JBL0645	RRP: £805.00

Accessories

MTC-RG6/8		
Round grille for Control 328 and Control 227.		
MTC-RG6/8	JBL0732	RRP: £45.00

MTC-300BB8		
Backcan for Control 328. 16 gauge metal construction lined with heavy duty MDF. 15" diameter x 10.6" deep.		
MTC-300BB8	JBL0649	RRP: £120.00

MTC-300BB12		
Backcan for 12" models. 16 gauge metal construction lined with heavy duty MDF. 23" x 18" x 12.8".		
MTC-300BB12	JBL0650	RRP: £350.00

MTC-300SG12		
Square white metal grille for 12" models.		
MTC-300SG12	JBL0652	RRP: £60.00

MTC-300T150		
Optional 150W transformer		
MTC-300T150	JBL0653	RRP: £120.00


Accessories


MTC-48TRx12		
Tile rail for 4' x 4' ceiling tiles. Can be used with any JBL ceiling speakers having the C-ring/tile-rail mounting system. eg. Control 24, Control 26, Control 47, Control 40, Control 42, Control 226, 8124/8. Not for speakers which install with tile bridges eg CSS series, 8138, Control 300 series. One pack contains 12 rails, enough for 6 speakers.		
MTC-48TRx12	JBL1215	RRP: £420.00

JBL-MTC-CSTeth1		
JBL-MTC-CSTeth1 retrofit safety tether for JBL Control 10, 20 and 40 Series ceiling speakers with press-in grilles. This durable, reliable safety tether is constructed from strong, highly flame-resistant aramid fiber cord and is virtually invisible and acoustically transparent. The JBL-MTC-CSTeth1 is sold in packs of ten and supports JBL Control 10 Series, Control 20 Series and Control 40 Series speaker lines.		
JBL-MTC-CSTeth1	JBL2066	RRP: £45.00

In-Wall Speakers

Control 100 In-Wall Series

Control 126W		
Premium in-wall loudspeaker. Two-way with 6.5" woofer and titanium tweeter. High-slope crossover network. 50W continuous, 8, 88dB sensitivity. 38Hz-20kHz frequency response. 99mm depth. Paintable. Priced as each, sold in pairs.		
Control 126W	JBL0586	RRP: £285.00

Control 128W		
Premium in-wall loudspeaker. Two-way with 8" woofer and titanium tweeter. High-slope crossover network. 60W continuous at 8. 90dB sensitivity. 30Hz-20kHz frequency response. 102mm depth. Paintable. Priced as each, sold in pairs.		
Control 128W	JBL0587	RRP: £355.00

Control 126WT

Premium in-wall loudspeaker. Two-way with 6.5" woofer and titanium tweeter. High-slope crossover network. 50W continuous, 8 ohm, 88dB sensitivity. 38Hz-20kHz frequency response. 99mm depth. Paintable. 70/100V transformer. Taps at 30W, 15W and 7.5W (plus 3.7W at 70V only). Priced as each, sold in pairs.



Control 126WT	JBL0606	RRP: £320.00
---------------	---------	--------------

Control 128WT

Premium in-wall loudspeaker. Two-way with 8" woofer and titanium tweeter. High-slope crossover network. 60W continuous at 8 ohm. 90dB sensitivity. 30Hz-20kHz frequency response. 102mm depth. Paintable. 70/100V transformer. Taps at 50W, 25W and 12W (plus 6W at 70V only). Priced as each, sold in pairs.



Control 128WT	JBL0607	RRP: £390.00
---------------	---------	--------------

Landscape Speakers

Control 85M

Two-way 5.25" coaxial mushroom landscape speaker. 80W Pink Noise Power Handling (160W program) in direct 8 setting, plus built-in 30W 70V/100V multi-tap transformer. Tough polyethylene highly weather resistant enclosure. Fully isolated center chamber for wiring protection. High fidelity sound character with broad frequency range of 55Hz - 18kHz.



Control 85M	JBL1753	RRP: £375.00
-------------	---------	--------------

Control 88M

Two-way 8" coaxial mushroom landscape speaker. 120W Pink Noise Power Handling (240W program) in direct 8 setting, plus built-in 60W 70V/100V multi-tap transformer. Tough polyethylene highly weather resistant enclosure. Fully isolated center chamber for wiring protection. High fidelity sound character with broad frequency range of 47Hz - 16kHz.



Control 88M	JBL1754	RRP: £560.00
-------------	---------	--------------

Control 89MS

The JBL Control 89MS Above-Ground Landscape Subwoofer augments the low-frequency performance of the JBL Control 80 Series landscape speaker line (and other outdoor systems) to provide rich bass in lawn, garden, and entrance areas of hotels, restaurants and other hospitality and retail complexes, as well as theme parks, sports venues, resorts, entranceways, and anywhere a highly weather-resistant speaker is required.



CONTROL 89MS	JBL2133	RRP: £495.00
--------------	---------	--------------

GSF3

The compact, weather-resistant JBL GSF3 landscape loudspeaker provides superior fidelity and wide coverage in a range of outdoor commercial applications, with a custom two-way coaxial 3-inch driver system that delivers full-range, crystal-clear sound.



GSF3-GN	JBL2125	RRP: £250.00
---------	---------	--------------

GSF3-TN	JBL2126	RRP: £250.00
---------	---------	--------------

GSF6

The mid-size, weather-resistant JBL GSF6 landscape loudspeaker provides superior fidelity and wide coverage in a range of outdoor commercial applications, with a custom two-way coaxial 6-inch driver system that delivers full-range, crystal-clear sound.



GSF6-GN	JBL2127	RRP: £335.00
---------	---------	--------------

GSF6-TN	JBL2128	RRP: £335.00
---------	---------	--------------

GSB8

The JBL GSB8 in-ground 8-inch landscape subwoofer augments the low-frequency performance of JBL GSF full-range landscape speakers to provide rich, full-range sound in lawn and garden areas of hospitality, corporate and retail spaces.



GSB8-GN	JBL2123	RRP: £595.00
---------	---------	--------------

GSB8-TN	JBL2124	RRP: £595.00
---------	---------	--------------

GSB12

The JBL GSB12 in-ground 12-inch landscape subwoofer augments the low-frequency performance of JBL GSF full-range landscape speakers to provide rich, full-range sound in lawn and garden areas of hospitality, corporate and retail spaces.



GSB12-GN	JBL2121	RRP: £930.00
----------	---------	--------------

GSB12-TN	JBL2122	RRP: £930.00
----------	---------	--------------

Pendant Speakers

Control 60 Series

Control 62P

Ultra-compact mid-high satellite pendant speaker. 2" driver. 25W continuous, 16 ohms. 140° conical coverage. 84dB sensitivity. Can intermix with Control 52 surface mount and Control 42C in-ceiling speakers. For full-range, wide bandwidth performance, up to 4 pieces can be driven from a Control 50S/T or Control 40CS/T subwoofer. Available in black or white.



Control 62P	JBL1090	RRP: £175.00
Control 62P-WH	JBL1091	RRP: £175.00

Control 68HP

The JBL Control 68HP full-range two-way pendant loudspeaker provides high output, high power handling, superior clarity and consistent coverage in rooms with open-architecture ceilings, live spaces and other locations where a pendant loudspeaker is desired.



Control 68HP	JBL2134	RRP: £690.00
Control 68HP-WH	JBL2135	RRP: £690.00

Control 64P/T

Compact full-range, pendant loudspeaker that provides superb sound reproduction for rooms with open architecture ceilings and other locations where a pendant form factor is desired. 4" full-range driver with 0.8" high temperature voice coil. 120 degree conical coverage. 100W continuous, 8 ohms plus 30W multi-tap transformer. 88dB nominal sensitivity, max SPL 105dB continuous. Available in black or white.



Control 64P/T	JBL1755	RRP: £295.00
Control 64P/T-WH	JBL1801	RRP: £295.00

Control 65 P/T

Compact full-range pendant speaker. Incorporates JBL's exclusive Radiation Boundary Integration (RBI) technology to provide very consistent, wide coverage. 120° conical coverage. 5.25" LF driver with silk-dome tweeter. 75 watts continuous. 8 ohms and 60W multi-tap transformer. 86dB sensitivity. Available in black or white.



Control 65P/T	JBL1092	RRP: £395.00
Control 65P/T-WH	JBL1093	RRP: £395.00

Control 67 P/T

Extended full-range pendant speaker. Incorporates JBL's exclusive Radiation Boundary Integration (RBI) technology to provide very consistent, wide coverage. 120° conical coverage. 6" LF driver with silk-dome tweeter for extended bass and hi-fidelity performance. 75 watts continuous, 8 ohms and 60W multi-tap transformer. 90dB sensitivity. Available in black or white. Priced individually, sold in pairs only.



Control 67P/T	JBL1094	RRP: £565.00
Control 67P/T-WH	JBL1095	RRP: £565.00

Control 67HC/T

Narrow coverage high-ceiling pendant speaker. Ideal for improved voice intelligibility and musical clarity in high ceiling venues or in rooms with difficult acoustics. 75° conical coverage. 6" LF driver with silk-dome tweeter for extended bass and hi-fidelity performance. High 93dB sensitivity. 75 watts continuous. 8 ohms and 60W multi-tap transformer. Black or white.



Control 67HC/T	JBL1096	RRP: £665.00
Control 67HC/T-WH	JBL1097	RRP: £665.00

Control 60PS/T



The Control 60PS/T pendant subwoofer loudspeaker provides bass extension and high impact for high-fidelity sound systems in a wide variety of applications. 8 ohm (150 Watt) and 70V/100V (100 Watt) operation, built-in passive crossover for up to four satellite speakers, 8" long-excursion driver, hanging hardware included. Black or white.

Control 60PS/T	JBL1630	RRP: £670.00
Control 60PS/T-WH	JBL1631	RRP: £670.00

MTC-PC60

Terminal cover for Control 60, Control 65 and Control 67 models.

MTC-PC60	JBL1273	RRP: £25.00
----------	---------	-------------

MTC-PC62

Terminal cover for Control 62P

MTC-PC62	JBL1274	RRP: £20.00
----------	---------	-------------

Paging Horns

CSS-H15

Paging horn providing excellent voice range clarity for public address systems, announcement/paging, intercom, security, alarm and industrial applications. High sensitivity delivers high sound levels with minimal power amplification. Wide 70°x90° coverage for medium capability. Phenolic diaphragm driver for outdoor durability and high reliability. IP65 rated for weather resistance. UL-registered 15-watt multi-tap transformer, with 8 ohm direct bypass. Built-in high-pass filter enhances reliability by protecting against low frequency damage.



CSS-H15	JBL1613	RRP: £150.00
---------	---------	--------------

CSS-H30

Paging Horn providing excellent voice range clarity for public address systems, announcement/paging, intercom, security, alarm and industrial applications. High sensitivity delivers high sound levels with minimal power amplification. Focused 50°x70° coverage for long throw capability. Phenolic diaphragm driver for outdoor durability and high reliability. IP65 rated for weather resistance. UL-registered 30-watt multi-tap transformer, with 8 ohm direct bypass. Built-in high-pass filter enhances reliability by protecting against low frequency damage. Highly weather-resistant, with stainless steel bracket and hardware.



CSS-H30	JBL1614	RRP: £205.00
---------	---------	--------------

Column Speakers

CBT Series

CBT 1000

The CBT1000 combines the features of the CBT series with a higher SPL output. Six 6.5" LF drivers and 24 1" HF drivers. Frequency range 45Hz - 20kHz. Sensitivity 102dB (2.83v @ 1m) at highest setting, 95dB at lowest setting. Nominal impedance 4 ohms. Max SPL 131dB continuous pink noise, 137dB peak. Constant Beamwidth Technology™ provides constant directivity up to the highest frequencies and reduces out of coverage lobing. 16 vertical coverage patterns. Patent-pending tapered horizontal waveguide delivers superior coverage in both front and rear of the room. Switchable music/speech voicing. Pan/tilt wall bracket included.



CBT 1000	JBL1780	RRP: £4,275.00
----------	---------	----------------

CBT 1000-WH	JBL1802	RRP: £4,275.00
-------------	---------	----------------

CBT 1000E

Bass extension cabinet for the CBT1000. Provides extended bass response, extended pattern control and increased SPL. Six 6.5" high-excursion drivers. 1500W power handling. Built-in crossover network for combining with CBT1000. Coupler plate included.



CBT 1000E	JBL1781	RRP: £2,340.00
-----------	---------	----------------

CBT 1000E-WH	JBL1803	RRP: £2,340.00
--------------	---------	----------------

CBT 200LA-1

Patented Constant Beamwidth Technology™ provides true wide-band constant directivity coverage up to the highest frequencies and reduces out-of-coverage lobing. 200 cm height extends pattern control to include lower frequencies. 32 2" full range drivers. 130Hz-18kHz (±3dB) Vertical pattern coverage switchable between 30° and 15°. 150°horizontal. 650W (2hrs), 123dB max SPL. Built-in 70/100v transformer or 8. Pan/tilt bracket included. Black or white.



CBT 200LA-1	JBL1209	RRP: £3,575.00
CBT 200LA-1-WH	JBL1210	RRP: £3,575.00

CBT 100LA-1

100cm Constant Beamwidth Technology™ line array column speaker. 16x2" drivers. Switchable 40° or 15° vertical coverage, 150° horizontal. Music/speech switch. 100W multi-tap transformer or 8 ohms. 80Hz-20kHz frequency response. 325W continuous power handling, 8. 96dB sensitivity. New -1 version has pan/tilt wall bracket and thicker, stronger grille. Black or white.



CBT 100LA-1	JBL1151	RRP: £1,530.00
CBT 100LA-1-WH	JBL1152	RRP: £1,530.00

CBT100LA-LS

Line Array Column Loudspeaker with Sixteen 50 mm (2 in) Drivers and EN54:24 CertificationThe CBT 100LA-LS, with Constant Beamwidth Technology™, represents a breakthrough in pattern control consistency, utilizing complex analog delay beam-forming and amplitude tapering to accomplish superior, consistent vertical coverage without the narrow vertical beaming and out-of-coverage lobing that are typical of straight form-factor column speakers. This loudspeaker is EN 54-24 Compliant for life safety ...



CBT 100LA-LS-WH	JBL1642	RRP: £1,665.00
CBT 100LA-LS	JBL1710	RRP: £1,665.00

CBT 70J-1

70cm J-shaped co-axial line array with Constant Beamwidth Technology™ and asymmetrical coverage. 16x1" and 4x5" drivers. Switchable 40° or 25° vertical coverage, 150° horizontal. Music/speech switch. 60Hz-20kHz frequency response. 500W continuous power handling, 8. New -1 version has pan/tilt wall bracket and thicker, stronger grille. Black or white.



CBT 70J-1	JBL1153	RRP: £2,155.00
CBT 70J-1-WH	JBL1154	RRP: £2,155.00

CBT 70JE-1

70cm extension for CBT70J. 4x5" drivers. 8 ohms. 500W continuous power handling. 90dB sensitivity. Combined with CBT70J, system response is 45-20kHz with pattern control to 400Hz. New -1 version has pan/tilt wall bracket and thicker, stronger grille. Black or white.



CBT 70JE-1	JBL1155	RRP: £1,225.00
CBT 70JE-1-WH	JBL1156	RRP: £1,225.00

CBT 50LA-1

50cm Constant Beamwidth Technology™ line array column speaker. 8x2" drivers. 20° vertical, 150° horizontal coverage. 93dB sensitivity. Music/speech switch. 60W multi-tap transformer or 8 ohms. 80Hz-20kHz frequency response. 150W continuous power handling, 8. New -1 version has pan/tilt wall bracket and thicker, stronger grille. Black or white.



CBT 50LA-1	JBL1149	RRP: £840.00
CBT 50LA-1-WH	JBL1150	RRP: £840.00

CBT 50LA-LS

Line Array Column Loudspeaker with Eight 50 mm (2 in) Drivers and EN54:24 CertificationThe CBT 50LA-LS, with Constant Beamwidth Technology™, represents a breakthrough in pattern control, utilizing analog delay beamforming and amplitude tapering to accomplish consistent vertical coverage without the narrow vertical beaming and out-of-coverage lobing that are typical of straight form-factor passive column speakers. This loudspeaker is EN 54-24 Compliant for life safety applications.



CBT 50LA-LS	JBL1619	RRP: £880.00
CBT 50LA-LS-WH	JBL1394	RRP: £880.00

CBT1K-ACC1

Accessory kit for the CBT1000 + E system. Consists of 2x MTC-CBT-FM3 flush mount brackets, 1x MTC-CBT-OS3 offset bracket, and coupler plate for locating CBT1000E extension cabinet above CBT1000 instead of below it.

CBT1K-ACC1	JBL1860	RRP: £180.00
------------	---------	--------------

MTC-CBT-SUS3

Suspension bracket for CBT series loudspeakers. 2pcs to provide top and bottom attachment points. Available in black and white.

MTC-CBT-SUS3	JBL1830	RRP: £60.00
MTC-CBT-SUS3-WH	JBL1831	RRP: £60.00

MTC-CBT-70T

Bolt on transformer module to allow CBT70J-1 or CBT70JE-1 speaker to be used on a 70V/100V distributed line. 120W multi-tap, gland nuts provide water tight cable entrance and exit.



MTC-CBT-70T	JBL1330	RRP: £195.00
MTC-CBT-70T-WH	JBL1832	RRP: £195.00



MTC-CBT-FM1		
Flush-mount wall bracket for CBT50LA-1 and CBT100LA-1. Available in black and white		
MTC-CBT-FM1	JBL1157	RRP: £70.00
MTC-CBT-FM1-WH	JBL1158	RRP: £70.00

MTC-CBT-FM2		
Flush-mount wall bracket for CBT70J-1 and 70J-1/JE-1. Available in black and white.		
MTC-CBT-FM2	JBL1159	RRP: £95.00
MTC-CBT-FM2-WH	JBL1160	RRP: £95.00


MTC-CBT-SMB1		
Stand-mount bracket for CBT loudspeakers		
MTC-CBT-SMB1	JBL0932	RRP: £100.00

COL Slim Column Speakers

COL600		
<p>A combination of stylish design and outstanding performance features makes the COL600 slim column loudspeaker ideal for a wide variety of applications, such as conference/meeting rooms, lecture halls, retail stores, concourses, transit spaces, fill applications, audio for video, and other applications where slim, compact design and high performance is desired.</p>	 	
COL600-BK	JBL2137	RRP: £430.00
COL600-WH	JBL2138	RRP: £430.00


COL800		
<p>A combination of stylish design and outstanding performance features makes the COL800 slim column loudspeaker ideal for a wide variety of applications, such as conference/meeting rooms, lecture halls, retail stores, concourses, transit spaces, fill applications, audio for video, and other applications where slim, compact design and high performance is desired.</p>	 	
COL800-BK	JBL2139	RRP: £595.00
COL800-WH	JBL2140	RRP: £595.00


Commercial Soundbars


Pro SoundBar PSB-1		
		
<p>This cost-effective, commercial-grade active soundbar is designed specifically for use in hotel guestrooms and cruise ship staterooms. Targeting these unique applications, the JBL Pro SoundBar PSB-1 reduces the cost and complexity found in consumer-grade soundbars while providing excellent sound quality, security, and reliability.</p>		
PSB-1/230	JBL1848	RRP: £395.00


Intellivox DSX Series


Column speakers with Beam Shaping. With the addition of 1" horn loaded dome tweeters and an extended frequency range of 130 - 18 kHz, the JBL Intellivox DSX range has been introduced for applications that require improved music clarity as well as speech intelligibility.


Intellivox DSX180		
<p>The Intellivox DC/DS180 is ideally suited for smaller less reverberant environments where improved speech intelligibility is required. It also can be used as a 'fill system' in larger Intellivox installations, providing coverage in shadow zones. A single Intellivox-DC/DS180 is capable of covering an area of up to 25m whilst maintaining an even sound pressure over the audience area. The twelve, custom designed, 4" loudspeakers are driven by an eight channel class-D amplifier. DSX models include a small horn array, extending the frequency response to 18kHz.</p>		
Intellivox DSX180, Amp@Bottom	JBL1461	RRP: £7,685.00
Intellivox DSX180, Amp@Top	JBL1462	RRP: £7,685.00

Intellivox DSX280 HD		
<p>The Intellivox-DSX280 HD is capable of providing a constant sound pressure level over a distance of up to 35 m, although a substantial extension of this range can be achieved in less demanding acoustical conditions. The twelve, custom designed, 4" loudspeakers and four discretely controlled, 1" dome tweeters are driven by a sixteen channel class-D amplifier, powered by a sophisticated switched mode power supply, all of which combine to ensure years of reliable operation. Extended Frequency Response - up to 18kHz.</p>		
Intellivox DSX280HD, Amp@Bottom	JBL1720	RRP: £10,525.00
Intellivox DSX280HD, Amp@Top	JBL1721	RRP: £10,525.00


Intellivox DSX280		
<p>The Intellivox DC/DS280 has proven to be a versatile and effective solution for vocal reinforcement within reverberant venues, offering excellent speech intelligibility even in demanding acoustic conditions. It is capable of providing a constant sound pressure level over a distance of up to 35m, although a substantial extension of this range can be achieved in less demanding acoustical conditions. The sixteen, custom designed, 4" loudspeakers are driven by an eight channel class-D amplifier. DSX models include a small horn array, extending the frequency response to 18kHz.</p>		
Intellivox DSX280 Amp at Top	JBL1473	RRP: £8,005.00


Intellivox DSX380		
<p>The Intellivox-DSX380 is capable of providing a constant sound pressure level over a distance of up to 45 m, although a substantial extension of this range can be achieved in less demanding acoustical conditions. The sixteen, custom designed, 4" loudspeakers and four 1" dome tweeters are driven by a sixteen channel class-D amplifier, powered by a sophisticated switched mode power supply, all of which combine to ensure years of reliable operation. The dome tweeters in the DSX units not only improve the horizontal coverage at high frequencies but also enhance the subjective sound quality of the system for both speech and music.</p>		
Intellivox DSX380, Amp@Bottom	JBL1672	RRP: £14,895.00
Intellivox DSX380, Amp@Top	JBL1673	RRP: £14,895.00

Intellivox DSX430		
<p>The Intellivox DC/DS430 is the second tallest of Duran Audio's fully integrated digitally controlled loudspeaker arrays. A single Intellivox DC/DS430 is capable of covering an area of up to 50m whilst maintaining an even sound pressure level. Its array length not only offers long throw capability but also extended control at lower frequencies, making it ideally suited to highly reverberant environments. Seventeen, custom designed, 4" loudspeakers are driven by a sixteen channel class-D amplifier. The increased lower frequency control offered by the array makes the Intellivox DC/DS430 suitable for easy and unobtrusive implementation in highly reverberant and architecturally sensitive environments. DSX models include a small horn array, extending the frequency response to 18kHz.</p>		
Intellivox DSX430, Amp@Bottom	JBL1483	RRP: £18,220.00
Intellivox DSX430, Amp@Top	JBL1484	RRP: £18,220.00

Intellivox DSX500		
<p>The Intellivox DC/DS500 is the flagship of the slim line Intellivox DDC and DDS ranges. With an array length in excess of 4m the Intellivox DC500/DS500 not only offers long throw capability but also greater control at lower frequencies. A single DC500/DS500 is capable of covering an area up to 70 m while maintaining an even sound pressure level. The thirty two, custom designed, 4" loudspeakers are driven by a sixteen channel class-D amplifier, powered by a sophisticated switched mode power supply, all of which combine to ensure years of reliable operation. An extensive set of surveillance functions have been implemented to meet the stringent demands of typical Voice Alarm (life safety) applications. The increased low-mid frequency control offered by the array makes the Intellivox DC500/DS500 suitable for easy and unobtrusive implementation in very large, highly reverberant and architecturally sensitive environments. DSX models include a small horn array, extending the frequency response.</p>		
Intellivox DSX500 Amp at Bottom	JBL1494	RRP: £15,785.00
Intellivox DSX500, Amp@Top	JBL1495	RRP: £20,750.00

DDS Series

Intellivox DS115		
<p>The Intellivox DC/DS115, the smallest member of the Intellivox range, are primarily designed to be used as a 'fill system' in larger Intellivox installations, providing high frequency coverage in off axis or shadowed areas. Intellivox DC/DS115 offers remarkably tight directivity and is capable of covering an area up to 15m while maintaining an even sound pressure over the audience area. The six, custom designed, 4" loudspeakers and two dome tweeters are driven by an eight channel class-D amplifier.</p>		
Intellivox DS115, Amp@Bottom IVX-587000	JBL1451	RRP: £5,245.00
Intellivox DS115, Amp@Top IVX-587001	JBL1452	RRP: £5,245.00

Intellivox HP-DS170		
<p>elf-contained, especially high-power and high-output, 2-way, wide-bandwidth beam-shaping powered column loudspeaker with a high degree of outdoor capability. Capable of delivering up to 106 dB SPL at 30 meters and has a horizontal dispersion of 100°. With an array length of 1.7 metres it is designed to fit unobtrusively into spaces with challenging architectural and acoustical factors. Enclosing ten, high efficiency, 6.5" loudspeakers and two coaxially mounted 1" compression drivers, each with dedicated amplification, the Intellivox HP-DS170 is capable of covering a substantial audience area while maintaining an even sound pressure level throughout.</p>		
Intellivox HP-DS170	JBL1788	RRP: £11,615.00

Intellivox DS180

The Intellivox DC/DS180 is ideally suited for smaller less reverberant environments where improved speech intelligibility is required. It also can be used as a 'fill system' in larger Intellivox installations, providing coverage in shadow zones. A single Intellivox-DC/DS180 is capable of covering an area of up to 25m whilst maintaining an even sound pressure over the audience area. The twelve, custom designed, 4" loudspeakers are driven by an eight channel class-D amplifier.



Intellivox DS180, Amp@Bottom	JBL1463	RRP: £7,685.00
Intellivox DS180, Amp@Top	JBL1464	RRP: £7,685.00

Intellivox DS280

The Intellivox DC/DS280 has proven to be a versatile and effective solution for vocal reinforcement within reverberant venues, offering excellent speech intelligibility even in demanding acoustic conditions. It is capable of providing a constant sound pressure level over a distance of up to 35m, although a substantial extension of this range can be achieved in less demanding acoustical conditions. The sixteen, custom designed, 4" loudspeakers are driven by an eight channel class-D amplifier.



Intellivox DS280, Amp@Bottom	JBL1474	RRP: £10,525.00
Intellivox DS280, Amp@Top	JBL1475	RRP: £10,525.00

Intellivox HP-DS370

The Intellivox HP-DS370 is a self-contained, especially high-power and high-output, 2-way, wide-bandwidth beam-shaping powered loudspeaker column loudspeaker with a high degree of outdoor capability. Capable of delivering up to 108 dB SPL at 30 meters (100 ft), as well as a frequency response to 18kHz. With an array length of 3.7 meters (12' 2") the Intellivox HP-DS370 not only offers long throw capability but also greater control at low frequencies. Intellivox HP-DS370 is capable of covering a substantial audience area while maintaining an even sound pressure level throughout. The fourteen, high efficiency, 6.5" loudspeakers are arranged in accordance with our patented algorithm. Two coaxially mounted 1" compression drivers extend the HF response.



Intellivox HP-DS370	JBL1671	RRP: £25,270.00
---------------------	---------	-----------------

Intellivox DS430

The Intellivox DC/DS430 is the second tallest of Duran Audio's fully integrated digitally controlled loudspeaker arrays. A single Intellivox DC/DS430 is capable of covering an area of up to 50m whilst maintaining an even sound pressure level. Its array length not only offers long throw capability but also extended control at lower frequencies, making it ideally suited to highly reverberant environments. Seventeen, custom designed, 4" loudspeakers are driven by a sixteen channel class-D amplifier. The increased lower frequency control offered by the array makes the Intellivox DC/DS430 suitable for easy and unobtrusive implementation in highly reverberant and architecturally sensitive environments.



Intellivox DS430 Amp at Bottom	JBL1485	RRP: £13,860.00
Intellivox DS430, Amp@Top	JBL1486	RRP: £18,220.00

Intellivox DS500

The Intellivox DC/DS500 is the flagship of the slim line Intellivox DDC and DDS ranges. With an array length in excess of 4m the Intellivox DC500/DS500 not only offers long throw capability but also greater control at lower frequencies. A single DC500/DS500 is capable of covering an area up to 70 m while maintaining an even sound pressure level. The thirty two, custom designed, 4" loudspeakers are driven by a sixteen channel class-D amplifier, powered by a sophisticated switched mode power supply, all of which combine to ensure years of reliable operation. An extensive set of surveillance functions have been implemented to meet the stringent demands of typical Voice Alarm (life safety) applications. The increased low-mid frequency control offered by the array makes the Intellivox DC500/DS500 suitable for easy and unobtrusive implementation in very large, highly reverberant and architecturally sensitive environments.



Intellivox DS500, Amp@Bottom	JBL1496	RRP: £20,750.00
------------------------------	---------	-----------------

ADC Series

Intellivox V90 MkII

The JBL Intellivox ADC (Analogue Directivity Control) Mark II range is intended for use in 70V/100V Public Address and Voice Alarm (PA/VA) systems. As with other Intellivox products the ADC range has been designed to maximise listening comfort and provide highly intelligible speech reproduction even within difficult reverberant spaces.



Intellivox V-90 MKII, Rai 9010 IVX-577125	JBL1526	RRP: £1,865.00
Intellivox V-90 MKII, Special colour IVX-577135	JBL1528	RRP: £2,265.00

Intellivox H90 MkII



The JBL Intellivox ADC (Analogue Directivity Control) Mark II range is intended for use in 70V/100V Public Address and Voice Alarm (PA/VA) systems. As with other Intellivox products the ADC range has been designed to maximise listening comfort and provide highly intelligible speech reproduction even within difficult reverberant spaces. EN54-24 compliant.

Intellivox H-90 MKII Symmetric Directivity Control, Ral 9010 IVX-577126	JBL1527	RRP: £1,955.00
---	---------	----------------

Options and Accessories

WAGO 231 female cable connector 5pin. Including strain relief housing	JBL1530	RRP: £35.00
WAGO 231 cable/male connector cage 5pin. Including strain relief housing	JBL1532	RRP: £35.00
Intellivox DC/DS Optional 100V / 0dBV input board	JBL1534	RRP: £340.00
Intellivox Wall Bracket 60mm, Set (2 pcs) Inc. fasteners, RAL9010	JBL1546	RRP: £100.00
Intellivox Wall Bracket 60mm, Set (3 pcs) RAL9010 IVX-802261	JBL1547	RRP: £110.00
Intellivox Hinge Bracket 90?, RAL9010	JBL1548	RRP: £90.00
Intellivox Swivel Wall Bracket 45?, RAL9010	JBL1550	RRP: £135.00
Intellivox Swivel Wall Bracket 90?, RAL9010	JBL1551	RRP: £135.00
Intellivox Cable entry cover box 2x M25, Inc. fasteners, RAL9010	JBL1553	RRP: £245.00
Intellivox Cable entry cover plate 2x PG13.5, Inc. fasteners, RAL9010	JBL1555	RRP: £50.00

Point Source Speakers

AE Expansion Series

AC895

Compact 2-way full-range loudspeaker system, 8" LF transducer, 90° x 50° Progressive Transition™ Field Rotatable Waveguide with a 1" exit 1" diaphragm compression driver, dual Neutrik NL4 connectors plus screw terminals, multiple attachment points. Frequency range 70Hz - 20kHz, nominal impedance 8 Ohms, 116db max SPL, system sensitivity 94db. Available in black or white



AC895	JBL1662	RRP: £985.00
AC895-WH	JBL1716	RRP: £985.00

AC195

Compact 2-way full-range loudspeaker system, 10" LF transducer, 90° x 50° Progressive Transition™ Field Rotatable Waveguide with a 1" exit 1.5" voice-coil compression driver, dual Neutrik NL4 connectors plus screw terminals, multiple attachment points. Frequency range 68Hz - 20kHz, nominal impedance 8 Ohms, 118db max SPL, system sensitivity 95db. Black or white.



AC195	JBL1663	RRP: £1,230.00
AC195-WH	JBL1761	RRP: £1,230.00

AC266

Compact 2-way full-range loudspeaker system, 12" LF transducer, 60° x 60° Waveguide with a 1" exit 1.5" diaphragm compression driver, dual Neutrik NL4 connectors plus screw terminals, multiple attachment points, robust 15mm enclosure with black textured finish. Frequency range 63Hz - 20kHz, nominal impedance 8 Ohms, 121db max SPL, system sensitivity 97db.



AC266?????? ?	JBL1664	RRP: £1,395.00
---------------	---------	----------------

AC299

Compact 2-way full-range loudspeaker system, 12" LF transducer, 90° x 90° Waveguide with a 1" exit 1.5" diaphragm compression driver, dual Neutrik NL4 connectors plus screw terminals, Multiple attachment points, robust 15mm enclosure with black textured finish. Frequency range 63Hz - 20kHz, nominal impedance 8 Ohms, 121db max SPL, system sensitivity 97db.



AC299	JBL1665	RRP: £1,395.00
-------	---------	----------------

AC115S

High power subwoofer, 15" LF driver in a vented, front-loaded configuration, frequency range 32Hz - 250Hz, Nominal impedance 8 Ohms, 120db max SPL, system sensitivity 94db.



AC115S	JBL1668	RRP: £1,395.00
AC115S-WH	JBL1857	RRP: £1,395.00

AC118S

High power subwoofer, 18" LF driver in a vented, front-loaded configuration, frequency range 32Hz - 250Hz, Nominal impedance 8 Ohms, 120db max SPL, system sensitivity 94db.



AC118S	JBL1669	RRP: £1,560.00
--------	---------	----------------

AC566

Compact 2-way full-range loudspeaker system, 15" LF transducer, 60° x 60° Waveguide with a 1" exit 1.5" diaphragm compression driver, dual Neutrik NL4 connectors plus screw terminals, multiple attachment points, robust 15mm enclosure with black textured finish. Frequency range 60Hz - 20kHz, nominal impedance 8 Ohms, 122db max SPL, system sensitivity 98db.



AC566	JBL1666	RRP: £1,560.00
-------	---------	----------------

AC599

Compact 2-way full-range loudspeaker system, 15" LF transducer, 90° x 90° Waveguide with a 1" exit 1.5" diaphragm compression driver, dual Neutrik NL4 connectors plus screw terminals, multiple attachment points, robust 15mm enclosure with black textured finish. Frequency range 60Hz - 20kHz, nominal impedance 8 Ohms, 122db max SPL, system sensitivity 98db.



AC599????? ?	JBL1667	RRP: £1,560.00
--------------	---------	----------------

Accessories


OSB-1		
Overhead Suspension Bracket for AC895, AC195, AC266, AC299, AC566 and AC599		
OSB-1	JBL1684	RRP: £60.00


MTU-895		
JBL U-Bracket for AC895 Loudspeaker		
MTU-895	JBL1679	RRP: £140.00


MTU-266-99		
U-Bracket for AC266 and AC299		
MTU-266-99	JBL1681	RRP: £180.00


MTU-566-99		
U-Bracket for AC566 / AC599 Loudspeakers		
MTU-566-99	JBL1682	RRP: £200.00


AE Compact Series


AC15		
Ultra-compact two-way. 5.25" LF driver, 1" dome tweeter with 90°x 90° coverage. 225W continuous, 16 ohm. 86dB sensitivity. Dual Neutrik® NL4 connectors plus screw terminal. Points for optional MTU-15 U-bracket. Black or White. Priced as each, sold as pairs.		
AC15	JBL0763	RRP: £645.00
AC15-WH	JBL0981	RRP: £645.00


AC25		
Ultra-compact two-way. Two 5.25" LF drivers, 1" dome tweeter with 90°x 90° coverage. 300W continuous, 16 ohm. 91dB sensitivity. Dual Neutrik® NL4 connectors plus screw terminal. Points for optional MTU-25 U-bracket. Black or White. Priced as each, sold as pairs.		
AC25	JBL0764	RRP: £1,205.00
AC25-WH	JBL1003	RRP: £1,205.00

AC16		
Ultra-compact two-way. 6.5" LF driver, 1" dome tweeter with 90°x 90° coverage PT Waveguide. 250W continuous, 16. 90dB sensitivity. Dual Neutrik® NL4 connectors plus screw terminal. Points for optional MTU-16 U-bracket, third party OmniMount® type bracket and stand mount. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection. Priced as each, sold as pairs.		
AC16	JBL0765	RRP: £1,305.00
AC16-WH	JBL0982	RRP: £1,305.00
AC16-WRC	JBL0983	RRP: £1,400.00
AC16-WRX	JBL0984	RRP: £1,925.00

AC26		
Ultra-compact two-way. 6.5" LF driver, 1" dome tweeter with 90°x 90° coverage PT Waveguide. 350W continuous, 8 ohm. 92dB sensitivity. Dual Neutrik® NL4 connectors plus screw terminal. Points for optional MTU-16 U-bracket, third party OmniMount® type bracket and stand mount. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection. Priced as each, sold as pairs.		
AC26	JBL0768	RRP: £1,860.00
AC26-WH	JBL1004	RRP: £1,860.00
AC26-WRC	JBL1005	RRP: £2,350.00
AC26-WRX	JBL1006	RRP: £2,330.00

AC18/95		
Ultra-compact two-way. 8" LF driver, 1" dome tweeter. 90°x 50° coverage PT Waveguide. 375W continuous, 8 ohm. 92dB sensitivity. Dual Neutrik® NL4 connectors plus screw terminal. Points for optional MTU-18 U-bracket. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AC18/95	JBL0767	RRP: £1,595.00
AC18/95-WH	JBL0988	RRP: £1,595.00
AC18/95-WRC	JBL0989	RRP: £2,190.00
AC18/95-WRX	JBL0990	RRP: £2,480.00

AC18/26		
Ultra-compact two-way. 8" LF driver, 1" dome tweeter. 120°x 60° coverage PT Waveguide. 375W continuous, 8 ohm. 92dB sensitivity. Dual Neutrik® NL4 connectors plus screw terminal. Points for optional MTU-18 U-bracket. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AC18/26	JBL0766	RRP: £1,595.00
AC18/26-WH	JBL0985	RRP: £1,595.00
AC18/26-WRC	JBL0986	RRP: £2,045.00
AC18/26-WRX	JBL0987	RRP: £2,320.00

AC28/95		
Ultra-compact two-way. Two 8" LF drivers, 1" dome tweeter. 90°x 50° coverage PT Waveguide. 700W continuous, 8 ohm. 94dB sensitivity. Dual Neutrik® NL4 connectors plus screw terminal. Points for optional MTU-28 U-bracket. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AC28/95	JBL0770	RRP: £2,155.00
AC28/95-WH	JBL1010	RRP: £2,155.00
AC28/95-WRC	JBL1011	RRP: £2,625.00
AC28/95-WRX	JBL1012	RRP: £2,920.00

AC28/26		
Ultra-compact two-way. Two 8" LF drivers, 1" dome tweeter. 120°x 60° coverage PT Waveguide. 700W continuous, 8 ohm. 94dB sensitivity. Dual Neutrik® NL4 connectors plus screw terminal. Points for optional MTU-28 U-bracket. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AC28/26	JBL0769	RRP: £2,155.00
AC28/26-WRX	JBL1009	RRP: £2,920.00
AC28/26-WH	JBL1007	RRP: £2,155.00



Accessories

MTU-15		
U-bracket for AC15. Black or White.		
MTU-15	JBL0824	RRP: £120.00
MTU-15-WH	JBL1251	RRP: £120.00

MTU-25		
U-bracket for AC25. Black or White		
MTU-25	JBL0825	RRP: £145.00
MTU-25-WH	JBL1254	RRP: £145.00

MTU-16		
U-bracket for AC16. Black or white.		
MTU-16	JBL0826	RRP: £155.00
MTU-16-WH	JBL1252	RRP: £155.00

MTU-26		
U-bracket for AC26. Black or White		
MTU-26	JBL0827	RRP: £170.00
MTU-26-WH	JBL1255	RRP: £170.00

MTU-18		
U-bracket for AC18. Black or White		
MTU-18	JBL0828	RRP: £180.00
MTU-18-WH	JBL1253	RRP: £180.00

MTU-28		
U-bracket for AC28. Black or White		
MTU-28	JBL0829	RRP: £225.00
MTU-28-WH	JBL1256	RRP: £225.00

AE Application Engineered Series 2 Way Full Range Systems

AM5212/64		
Medium power, lightweight, 2-way, full-range loudspeaker system comprised of a Differential Drive® 12" low frequency driver and 2408H-1 high frequency 1.5" exit, 1.5" voice-coil compression driver. 43Hz-18kHz (±3dB) frequency response. Power rating LF: 400W, HF: 40W (AES 2hr). Max SPL 127dB in passive mode, sensitivity 97dB SPL (1W, 1m). Large format rotatable PT waveguide. 60° x 40° coverage. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM5212/64	JBL0916	RRP: £2,695.00



AM5212/66		
Medium power, lightweight, 2-way, full-range loudspeaker system comprised of a Differential Drive® 12" low frequency driver and 2408H-1 high frequency 1.5" exit, 1.5" voice-coil compression driver. 43Hz-18kHz (±3dB) frequency response. Power rating LF: 400W, HF: 40W (AES 2hr). Max SPL 127dB in passive mode, sensitivity 97dB SPL (1W, 1m). Large format rotatable PT waveguide. 60° x 60° coverage. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM5212/66	JBL0978	RRP: £2,695.00





AM5212/95		
Medium power, lightweight, 2-way, full-range loudspeaker system comprised of a Differential Drive® 12" low frequency driver and 2408H-1 high frequency 1.5" exit, 1.5" voice-coil compression driver. 43Hz-18kHz (±3dB) frequency response. Power rating LF: 400W, HF: 40W (AES 2hr). Max SPL 127dB in passive mode, sensitivity 97dB SPL (1W, 1m). Large format rotatable PT waveguide. 90° x 50° coverage. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM5212/95	JBL0919	RRP: £2,695.00





AM5212/26		
Medium power, lightweight, 2-way, full-range loudspeaker system comprised of a Differential Drive® 12" low frequency driver and 2408H-1 high frequency 1.5" exit, 1.5" voice-coil compression driver. 43Hz-18kHz (±3dB) frequency response. Power rating LF: 400W, HF: 40W (AES 2hr). Max SPL 127dB in passive mode, sensitivity 97dB SPL (1W, 1m). Large format rotatable PT waveguide. 120° x 60° coverage. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM5212/26	JBL0925	RRP: £2,695.00





AM5212/00		
Medium power, lightweight, 2-way, full-range loudspeaker system comprised of a Differential Drive® 12" low frequency driver and 2408H-1 high frequency 1.5" exit, 1.5" voice-coil compression driver. 43Hz-18kHz (±3dB) frequency response. Power rating LF: 400W, HF: 40W (AES 2hr). Max SPL 127dB in passive mode, sensitivity 97dB SPL (1W, 1m). Large format rotatable PT waveguide. 100° x 100° coverage. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM5212/00	JBL0922	RRP: £2,695.00


AM5215/64		
Medium-power, lightweight 2-way full-range loudspeaker. 2265H-1 15" Differential Drive LF driver, 2408H-1 1.5" HF compression driver. Large format rotatable PT waveguide. 60° x 40° coverage. 41Hz-20kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM5215/64	JBL0904	RRP: £2,840.00


AM5215/66		
Medium-power, lightweight 2-way full-range loudspeaker. 2265H-1 15" Differential Drive LF driver, 2408H-1 1.5" HF compression driver. Large format rotatable PT waveguide. 60° x 60° coverage. 41Hz-20kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM5215/66	JBL0907	RRP: £2,840.00


AM5215/95		
Medium-power, lightweight 2-way full-range loudspeaker. 2265H-1 15" Differential Drive LF driver, 2408H-1 1.5" HF compression driver. Large format rotatable PT waveguide. 90° x 50° coverage. 41Hz-20kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM5215/95	JBL0910	RRP: £2,840.00


AM5215/26		
Medium-power, lightweight 2-way full-range loudspeaker. 2265H-1 15" Differential Drive LF driver, 2408H-1 1.5" HF compression driver. Large format rotatable PT waveguide. 120° x 60° coverage. 41Hz-20kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM5215/26	JBL0913	RRP: £2,840.00


AM7212/64		
High-power, lightweight 2-way full-range loudspeaker. 2262H 12" Differential Drive LF driver, 2432H 3" HF compression driver. Large format rotatable PT waveguide. 60° x 40° coverage. 42Hz-18kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7212/64	JBL0948	RRP: £4,050.00


AM7212/66		
High-power, lightweight 2-way full-range loudspeaker. 2262H 12" Differential Drive LF driver, 2432H 3" HF compression driver. Large format rotatable PT waveguide. 60° x 60° coverage. 42Hz-18kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7212/66	JBL0951	RRP: £4,050.00


AM7212/95		
High-power, lightweight 2-way full-range loudspeaker. 2262H 12" Differential Drive LF driver, 2432H 3" HF compression driver. Large format rotatable PT waveguide. 90° x 50° coverage. 42Hz-18kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7212/95	JBL0954	RRP: £4,050.00


AM7212/26		
High-power, lightweight 2-way full-range loudspeaker. 2262H 12" Differential Drive LF driver, 2432H 3" HF compression driver. Large format rotatable PT waveguide. 120° x 60° coverage. 42Hz-18kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7212/26	JBL0960	RRP: £4,050.00

AM7212/00		
High-power, lightweight 2-way full-range loudspeaker. 2262H 12" Differential Drive LF driver, 2432H 3" HF compression driver. Large format rotatable PT waveguide. 100° x 100° coverage. 42Hz-18kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7212/00	JBL0957	RRP: £4,050.00


AM7215/64		
High-power, lightweight 2-way full-range loudspeaker. 2265H-1 15" Differential Drive LF driver, 2432H-1 3" HF compression driver. Large format rotatable PT waveguide. 60° x 40° coverage. 40Hz-20kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7215/64	JBL0936	RRP: £4,250.00


AM7215/66		
High-power, lightweight 2-way full-range loudspeaker. 2265H-1 15" Differential Drive LF driver, 2432H-1 3" HF compression driver. Large format rotatable PT waveguide. 60° x 60° coverage. 40Hz-20kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7215/66	JBL0939	RRP: £4,250.00

AM7215/95		
High-power, lightweight 2-way full-range loudspeaker. 2265H-1 15" Differential Drive LF driver, 2432H-1 3" HF compression driver. Large format rotatable PT waveguide. 90° x 50° coverage. 40Hz-20kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7215/95	JBL0942	RRP: £4,250.00


AM7215/26		
High-power, lightweight 2-way full-range loudspeaker. 2265H-1 15" Differential Drive LF driver, 2432H-1 3" HF compression driver. Large format rotatable PT waveguide. 120° x 60° coverage. 40Hz-20kHz (±3dB) frequency response. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7215/26	JBL0945	RRP: £4,250.00


3 Way Systems


AM7315/64		
High power three-way loudspeaker. 1000W continuous, 8 ohm. 108dB sensitivity. 60° x 40° coverage. 15" Differential Drive LF driver, 8" CMCD cone midrange compression driver and 1.5" exit HF compression driver. Large rotatable PT™ waveguide. Bi-amp/tri-amp switchable. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7315/64	JBL1115	RRP: £6,040.00


AM7315/95		
High power three-way loudspeaker. 1000W continuous, 8 ohm. 108dB sensitivity. 90° x 50° coverage. 15" Differential Drive LF driver, 8" CMCD cone midrange compression driver and 1.5" exit HF compression driver. Large rotatable PT™ waveguide. Bi-amp/tri-amp switchable. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AM7315/95	JBL1112	RRP: £6,040.00


Low Frequency Systems


AL7115		
High power 1x15" low frequency loudspeaker. 1000W continuous, 8 ohm. 97dB sensitivity. 15" Differential Drive LF driver. Large vent area for high output with low distortion. Arrays with various AE Series mid-high frequency and compact 2-way models (see AE Series Array Guide at www.jblpro.com). Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
AL7115	JBL1124	RRP: £2,605.00

ASB4128		
Medium output dual 18" subwoofer. 1000W continuous, 4 ohm parallel drive mode. 103dB sensitivity. 2242H VGC™ drivers. Parallel/discrete switchable. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
ASB4128	JBL0062	RRP: £4,040.00

ASB6112		
Ultra-compact high-power 12" subwoofer. 2263H Differential Drive® woofer. 3" dual voice coil. 1000W continuous, 8 ohm. 96dB sensitivity. Multi-ply hardwood enclosure with DuraFlex finish. 16 M10 suspension points. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
ASB6112	JBL0891	RRP: £2,305.00

ASB6115		
Compact high-power 15" subwoofer. 2265H-1 Differential Drive® woofer. 3" dual voice coil. 800W continuous. 8, 97dB sensitivity. Multi-ply hardwood enclosure with DuraFlex finish. 16 M10 suspension points. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
ASB6115	JBL0892	RRP: £2,605.00

ASB6118		
High power single 18" subwoofer. 2242H VGC™ driver. 1200W continuous. 8, 98dB sensitivity. Arrays with AM6200 and AM4200 mid-high loudspeakers. Black.		
ASB6118	JBL0064	RRP: £3,355.00

ASB6125		
Dual 15" high-power subwoofer. 2265H-1 Differential Drive® woofers. 3" dual voice coil. 1600W continuous. 4 ohm parallel drive mode. 100dB sensitivity. Multi-ply hardwood enclosure with DuraFlex finish. 16 M10 suspension points. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
ASB6125	JBL0893	RRP: £4,090.00

ASB6128		
High power 2 x 18" subwoofer. 2242H VGC™ drivers. Parallel/discrete switchable. 2400W continuous. 4 ohm parallel drive mode. 102dB sensitivity. Arrays with AM6340 and AM4340 loudspeakers using PAK-2K planar array kit. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
ASB6128	JBL0066	RRP: £5,285.00



ASB7118		
Ultra high-power 18" subwoofer. 2269H Differential Drive® vented gap woofer. 4" dual voice coil. 2000W continuous. 8ohm, 96dB sensitivity. Multi-ply hardwood enclosure with DuraFlex finish. 16 M10 suspension points. Black or White. Also available with WRC Weather Resistant Protection or WRX Extreme Weather Protection.		
ASB7118	JBL0894	RRP: £5,020.00



ASB7128		
Dual 18" ultra high-power subwoofer. 2269H Differential Drive® vented gap woofers. 4" dual voice coil. 4000W continuous. 4 ohm parallel drive mode. 99dB sensitivity. Multi-ply hardwood enclosure with DuraFlex finish. 16 M10 suspension points. Black or White. WRC weather protection treatment.		
ASB7128	JBL0895	RRP: £8,810.00



Accessories

MTU-1		
U-bracket for models AM6215 and AM4215. Black or White.		
MTU-1	JBL0223	RRP: £320.00
MTU-1-WH	JBL0224	RRP: £320.00

MTU-2		
U-bracket for AC2215. Black or white.		
MTU-2	JBL0225	RRP: £320.00
MTU-2-WH	JBL0226	RRP: £320.00

MTU-3		
U-bracket for AM6212, AM5212 and AM4212 models. Black or white.		
MTU-3	JBL0227	RRP: £330.00
MTU-3-WH	JBL0228	RRP: £330.00

MTU-4		
U-bracket for AC2212. Black or white.		
MTU-4	JBL0229	RRP: £330.00
MTU-4-WH	JBL0230	RRP: £330.00

MTU-195		
U-bracket for AC195		
MTU-195	JBL1680	RRP: £155.00

All Weather Compact Series

AWC62		
Compact, coaxial driver, two highly weather resistant full range loudspeaker system. 6" woofer with Kevlar-reinforced cone and 1.5" voice coil. 1" exit compression driver with unique patented design and high temperature polymer diaphragm. Consistent 110° x 110° broadband pattern control. 175W continuous, 114dB max SPL. 120W 70/100v multi-tap transformer or 8 ohm. IP56 weather rating. Black or Grey. U-bracket included.		
AWC62	JBL1810	RRP: £615.00
AWC62-BK	JBL1811	RRP: £615.00



AWC82		
Compact, coaxial driver, two highly weather resistant full range loudspeaker system. 8" woofer with Kevlar-reinforced cone and 2" voice coil. 1" exit compression driver with unique patented design and high temperature polymer diaphragm. Consistent 120° x 120° broadband pattern control. 250W continuous, 118dB max SPL. 200W 70/100v multi-tap transformer or 8 ohm. IP56 weather rating. Black or Grey. U-bracket included.		
AWC82	JBL1211	RRP: £840.00
AWC82-BK	JBL1212	RRP: £840.00




AWC129		
Compact, coaxial driver, two highly weather resistant full range loudspeaker system. 12" woofer with Kevlar-reinforced cone and 3" voice coil. 1" exit compression driver with unique patented design and high temperature polymer diaphragm. Consistent 90° x 90° broadband pattern control. 400W continuous, 122dB max SPL. 200W 70/100v multi-tap transformer or 8. IP56 weather rating. Black or Grey. U-bracket included.		
AWC129	JBL1213	RRP: £1,570.00
AWC129-BK	JBL1214	RRP: £1,570.00



AWC159		
Compact, coaxial driver, two highly weather resistant full range loudspeaker system. 15" woofer with Kevlar-reinforced cone and 3" voice coil. 1" exit compression driver with unique patented design and high temperature polymer diaphragm. Consistent 90° x 90° broadband pattern control. 500W continuous, 125dB max SPL. 300W 70/100v multi-tap transformer or 8. IP56 weather rating. Black or Grey. U-bracket included.		
AWC159	JBL1632	RRP: £2,340.00
AWC159-BK	JBL1633	RRP: £2,340.00




AWC15LF		
Compact highly weather resistant loudspeaker for augmenting the low frequency capability of a sound system. 500W continuous, 121dB max SPL. 300W multitap transformer or 8 ohms direct. IP56 weather rating. Available in grey or black.		
		
AWC15LF	JBL1634	RRP: £1,775.00
AWC15LF-BK	JBL1635	RRP: £1,775.00


All Weather Series

AW266		
		
High power, lightweight, 2-way, full-range loudspeaker. 12" Differential Drive LF, 3" voice coil compression driver. 60° x 60° PT waveguide. 500W continuous. 8, 98dB sensitivity. 400W 70/100V transformer included. Heavily braced fibreglass enclosure with 14 gauge stainless steel grille backed with open cell foam and stainless steel mesh provides excellent protection in the harshest environments. Stainless steel U-type mounting bracket included. Available in grey or black.		
AW266	JBL1185	RRP: £5,435.00
AW266-BK	JBL1186	RRP: £5,435.00


AW266-LS		
EN54-certified version of the AW266. 400W power rating (100 hours). Frequency response ±3dB: 102Hz – 18kHz. Available in grey or black.		
AW266-LS	JBL1395	RRP: £5,435.00
AW266-LS-BK	JBL1706	RRP: £5,435.00

AW295		
High power, lightweight, 2-way, full-range loudspeaker. 12" Differential Drive LF, 3" voice coil compression driver. 90° x 50° PT waveguide. 500W continuous. 8 ohm, 98dB sensitivity. 400W 70/100V transformer included. Heavily braced fibreglass enclosure with 14 gauge stainless steel grille backed with open cell foam and stainless steel mesh provides excellent protection in the harshest environments. Stainless steel U-type mounting bracket included. Available in grey or black.		
		
AW295	JBL1187	RRP: £5,435.00
AW295-BK	JBL1188	RRP: £5,435.00


AW295-LS		
EN54-24 certified version of the AW295. 400W power rating (100 hours). Frequency response ±3dB: 102Hz – 18kHz. Available in grey or black.		
AW295-LS	JBL1396	RRP: £5,435.00

AW526		
High power, lightweight, 2-way, full-range loudspeaker. 15" Differential Drive LF, 3" voice coil compression driver. 120° x 60° rotatable PT waveguide. 600W continuous, 8, 99dB sensitivity. 400W 70/100V transformer included. Heavily braced fibreglass enclosure with 14 gauge stainless steel grille backed with open cell foam and stainless steel mesh provides excellent protection in the harshest environments. Stainless steel U-type mounting bracket included. Grey or black.		
		
AW526	JBL1189	RRP: £5,880.00
AW526-BK	JBL1190	RRP: £5,880.00

AW526-LS		
EN54-certified version of the AW526. 400W power rating (100 hours). Frequency response ±3dB: 86Hz – 17kHz. Available in grey or black.		
AW526-LS	JBL1707	RRP: £5,880.00
AW526-LS-BK	JBL1398	RRP: £5,880.00

AW566		
High power, lightweight, 2-way, full-range loudspeaker. 15" Differential Drive LF, 3" voice coil compression driver. 60° x 60° rotatable PT waveguide. 600W continuous, 8, 99dB sensitivity. 400W 70/100V transformer included. Heavily braced fibreglass enclosure with 14 gauge stainless steel grille backed with open cell foam and stainless steel mesh provides excellent protection in the harshest environments. Stainless steel U-type mounting bracket included. Grey or black.		
		
AW566	JBL1191	RRP: £5,880.00
AW566-BK	JBL1192	RRP: £5,880.00

AW566-LS		
EN54-certified version of the AW566. 400W power rating (100 hours). Frequency response ±3dB: 88Hz – 19kHz. Available in grey or black.		
AW566-LS	JBL1708	RRP: £5,880.00
AW566-LS-BK	JBL1399	RRP: £5,880.00

AW595		
High power, lightweight, 2-way, full-range loudspeaker. 15" Differential Drive LF, 3" voice coil compression driver. 90° x 50° rotatable PT waveguide. 600W continuous. 100dB sensitivity. 400W 70/100V transformer included. Heavily braced fibreglass enclosure with 14 gauge stainless steel grille backed with open cell foam and stainless steel mesh provides excellent protection in the harshest environments. Stainless steel U-type mounting bracket included. Grey or black.		
		
AW595	JBL1193	RRP: £5,880.00
AW595-BK	JBL1194	RRP: £5,880.00

AW595-LS		
EN54-certified version of the AW595. 400W power rating (100 hours). Frequency response ±3dB: 88Hz – 19kHz. Available in grey or black.		
AW595-LS	JBL1400	RRP: £5,880.00
AW595-LS-BK	JBL1401	RRP: £5,880.00

PD Precision Directivity Series

PD500 Series

PD564 / 566 / 595 / 544

15" horn-loaded full-range loudspeaker system, designed for applications requiring high output capability with excellent pattern control. Frequency response 90Hz - 17kHz (± 3 dB). System power rating 500W (2 hours, passive mode). Max SPL 132dB passive, 133dB LF, 132dB HF. Biamp/passive switchable. Duraflex finish. Available with 60x40, 60x60, 50x90 and 40x40 degree pattern control (rotatable where applicable).



PD564	JBL1687	RRP: £4,910.00
PD566	JBL1688	RRP: £3,855.00
PD595	JBL1689	RRP: £4,910.00
PD544	JBL1686	RRP: £4,910.00

PD525S

High output, dual 15" subwoofer. Two dual gap, dual coil Differential Drive drivers in a front-loaded, vented configuration. Trapezoidal cabinet fitted with M10 threaded suspension points. Enclosure dimensions compatible with all PD500 series models. 20Hz - 1.1kHz frequency response. Max SPL 135dB continuous. Black Duraflex finish (white available on request). IPx3 rated as standard. WRC and WRX options available.



PD525S	JBL1690	RRP: £3,505.00
--------	---------	----------------

PD6000 Series

PD6200/64

Specifications as per the PD6300/43, but with a 60°x40° coverage pattern.

PD6200/64	JBL1406	RRP: £4,910.00
-----------	---------	----------------

PD6200/95

Specifications as per the PD6300/43, but with a 90°x50° coverage pattern.

PD6200/95	JBL1414	RRP: £3,605.00
-----------	---------	----------------

PD6212/64

Specifications as per the PD6212/43 but with a 60°x40° waveguide.

PD6212/64	JBL1422	RRP: £5,565.00
-----------	---------	----------------

PD6212/66

Specifications as per the PD6212/43 but with a 60°x 60° waveguide.

PD6212/66	JBL1426	RRP: £5,565.00
-----------	---------	----------------

PD6212/95

Specifications as per the PD6212/43 but with a 90° x 50° waveguide.

PD6212/95	JBL1430	RRP: £5,565.00
-----------	---------	----------------

PD6322/43

The PD6322 Precision Directivity full range, three-way loudspeakers are designed for applications requiring high output sensitivity with excellent pattern control. They can be utilised standalone in demanding music or speech systems where low frequency extension to 40 Hz is required. High-output three-way full range loudspeaker with two 12" LF and 40° x 30° coverage pattern. 12" 2206H LF drivers, 8" CMCD-82H midrange compression driver and large format 2432H Neodymium HF driver. 41Hz to 17kHz frequency range. 991 x 673 x 897 mm, 87.3kg. Rotatable waveguide allows either horizontal or vertical cabinet orientation. Available in black & white, and with WRC and WRX weather protection on request.



PD6322/43	JBL1435	RRP: £8,835.00
-----------	---------	----------------

PD6322/66

Specifications as per the PD6322/43 but with a 60° x 60° coverage pattern.

PD6322/66	JBL1443	RRP: £6,550.00
-----------	---------	----------------

PD6322/95


Specifications as per the PD6322/43 but with a 90° x 50° coverage pattern.

PD6322/95	JBL1447	RRP: £6,550.00
-----------	---------	----------------

PD700i Series

PD743


Very high output mid-high loudspeaker. Continuous power rating MF 700W 8 ohm, HF 150W 16 ohm. Sensitivity MF 109dB, HF 116dB. Dual 8" horn loaded cone MF drivers. 40° x 30° coverage pattern. 200Hz- 15kHz ± 3 dB frequency response. Ten M10 suspension points. Black or white. Also available with weather protection treatment (WRC) or extreme weather treatment (WRX).



PD743	JBL0242	RRP: £17,490.00
-------	---------	-----------------

PD764i

Very high output mid-high loudspeaker. Continuous power rating MF 700W 8 ohm, HF 150W 16 ohm. Sensitivity MF 109dB, HF 116dB. Dual 8" horn loaded cone MF drivers. 60° x 40° coverage pattern. 200Hz- 15kHz ± 3 dB frequency response. Ten M10 suspension points. Black or white. Also available with weather protection treatment (WRC) or extreme weather treatment (WRX).



PD764i	JBL1928	RRP: £11,170.00
--------	---------	-----------------

PD743i-215


The PD743i-215 Precision Directivity™ loudspeaker provides high-impact sound reinforcement at throw distances that are beyond the reach of traditional single-driver designs. A single module produces greater than 104 dB SPL (continuous) at distances of 50 m (165 ft). The PD764i-215 may be used in clusters with other PD family modules or singly as part of a distributed system.



PD743i-215	JBL1925	RRP: £16,195.00
------------	---------	-----------------

PD764i-215

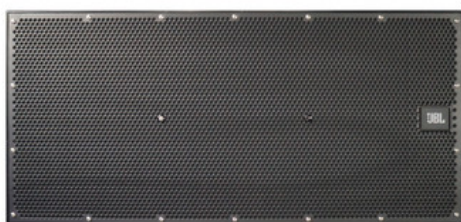
The PD764i-215 Precision Directivity™ loudspeaker provides high-impact sound reinforcement at throw distances that are beyond the reach of single-driver designs. A single module produces greater than 104 dB SPL (continuous) at distances of 50 m (165 ft). The PD764i-215 may be used in clusters with other PD family modules or singly as part of a distributed system.



PD764i-215	JBL1931	RRP: £14,860.00
------------	---------	-----------------

**Line Array Speakers
VLA Compact Series**

VLA C2100



Compact line array optimized for permanent install applications. Advanced technology component transducers for low weight and high output. Outdoor IP55 rated enclosure for protection from dust and water. Comprehensive rigging points for creating a line array configuration. Fiberglass box construction and weatherized components. 2x 2261, 10" diameter LF Drivers & 3x D2415, dual 1.5" diameter annular diaphragm HF Driver. 75Hz - 20kHz frequency response, 100 degrees horizontal coverage.

VLA-C2100-GR	JBL1826	RRP: £5,015.00
--------------	---------	----------------

VLA C265

Specifications as per the VLA-C2100, but with a 65 degree horizontal coverage pattern (+15°/-10°, 1.5 kHz to 15 kHz)

VLA-C265-GR	JBL1933	RRP: £5,015.00
-------------	---------	----------------

VLA C125S



The JBL VLA-C125S is a dual 15" subwoofer with Differential Drive® that can be used as part of a VLA Compact line array. The VLA-C125S features two 2267H 15" Differential Drive® woofers with 4" voice coils. The Variable Line Array (VLA) Compact Series is a line array loudspeaker solution built upon the industry-leading VLA Series. Designed to fill the needs of system designers for installations requiring the long-throw capabilities of the VLA in a more compact line array solution, the VLA Compact offers advanced audio capabilities, out-of-the-box weather protection and a fiberglass enclosure for stadiums and arenas and any other project in need of compact, high-powered line arrays.

VLA-C125S-GR	JBL1827	RRP: £4,150.00
--------------	---------	----------------

VLA-C-SB

Suspension Bar Kit for VLA-C loudspeakers

VLA-C-SB	JBL1934	RRP: £630.00
----------	---------	--------------

Commercial Audio

VMA Series Mixer/Amps

VMA 160



Cost-effective mixer/amplifier. 5 inputs with one 60W output. Independent bass and treble controls for each output channel. 100V and 70V output, or 4/8. Paging Chime, and Priority muting. Works with JBL CSR-V wall controllers. Balanced mic/line, RCA (.775V) and Bluetooth inputs. Rack mounting hardware included.

VMA160	JBL1773	RRP: £560.00
--------	---------	--------------

VMA 1120

Cost-effective mixer/amplifier. 5 inputs with one 120W output. Independent bass and treble controls for each output channel. 100V and 70V output, or 4/8. Paging Chime, and Priority muting. Works with JBL CSR-V wall controllers. Balanced mic/line, RCA (.775V) and Bluetooth inputs. Rack mounting hardware included.

VMA1120	JBL1774	RRP: £715.00
---------	---------	--------------

VMA 1240

Cost-effective mixer/amplifier. 5 inputs with one 240W output. Independent bass and treble controls for each output channel. 100V and 70V output, or 4/8. Paging Chime, and Priority muting. Works with JBL CSR-V wall controllers. Balanced mic/line, RCA (.775V) and Bluetooth inputs. Rack mounting hardware included.

VMA1240	JBL1775	RRP: £870.00
---------	---------	--------------

VMA 260

Cost-effective mixer/amplifier. 8 inputs with two 60W outputs. Independent bass and treble controls for each output channel. 100V and 70V output, or 4/8. Paging Chime, and Priority muting. Works with JBL CSR-V wall controllers. Balanced mic/line, RCA (.775V) and Bluetooth inputs. Rack mounting hardware included.

VMA260	JBL1776	RRP: £790.00
--------	---------	--------------

VMA 2120

Cost-effective mixer/amplifier. 8 inputs with two 120W outputs. Independent bass and treble controls for each output channel. 100V and 70V output, or 4/8. Paging Chime, and Priority muting. Works with JBL CSR-V wall controllers. Balanced mic/line, RCA (.775V) and Bluetooth inputs. Rack mounting hardware included.

VMA2120	JBL1777	RRP: £945.00
---------	---------	--------------

CS Series Mixers

CSM 14



4-input mixer with one output channel. Fanless, space-saving 1U design. Independent bass/treble controls. Euro-block type mic/line input and output connectors, and unbalanced RCA inputs for consumer connection. Supports JBL CSR-V wall controller via Ethernet cable. Priority muting, VOX ducking, and phantom power. Sleek industrial look with illuminated rings making them easy to see and use.

CSM14	JBL1603	RRP: £585.00
-------	---------	--------------

CSM 28



8-input mixer with two output channels and configurable output routing. Fanless, space-saving 1U design. Independent bass/treble controls. Euro-block type mic/line input and output connectors, and unbalanced RCA inputs for consumer connection. Supports JBL CSR-V wall controller via Ethernet cable. Priority muting, VOX ducking, and phantom power. Sleek industrial look with illuminated rings making them easy to see and use.

CSM28	JBL1604	RRP: £840.00
-------	---------	--------------

CS Series Mixer Amplifiers

CSMA 180



Commercial Series mixer-amplifier utilising Crown's DriveCore technology. 4 inputs with one 80W output. Can drive 8 & 4 ohm loads and 70/100V lines without need for a separate transformer. Ideal for commercial and industrial use. Fanless, space-saving 1U design. Sleek industrial look with illuminated rings, making them easy to see and operate. Euro-block type mic/line input connectors and output connectors. Independent Bass and Treble controls for each output channel. RJ45 connectors for use w

CSMA180	JBL1375	RRP: £895.00
---------	---------	--------------

CSMA 1120



Commercial Series mixer-amplifier utilising Crown's DriveCore technology. 4 inputs with one 120W output. Can drive 8 & 4 ohm loads and 70/100V lines without need for a separate transformer. Fanless, space-saving 1U design. Sleek industrial look with illuminated rings. Euro-block type mic/line input connectors and output connectors. Independent Bass and Treble controls for each output channel. RJ45 connectors for use with JBL CSR-V in-wall volume controls.

CSMA1120	JBL1376	RRP: £1,200.00
----------	---------	----------------

CSMA 280



Commercial Series mixer-amplifier utilising Crown's DriveCore technology. 8 inputs with two 80W outputs. Can drive 8 & 4 ohm loads and 70/100V lines without need for a separate transformer. Ideal for commercial and industrial use. Fanless, space-saving 1U design. Sleek industrial look with illuminated rings, making them easy to see and operate. Euro-block type mic/line input connectors and output connectors. Independent Bass and Treble controls for each output channel. RJ45 connectors for use with JBL CSR-V in-wall volume controls.

CSMA280	JBL1378	RRP: £1,305.00
---------	---------	----------------

CS Series Amplifiers

CSA 180Z

1 output channel with 80W output. Built-in 70V and 100V. Fanless, space-saving 1U design. Sleep mode disable function. Energy-efficient Drivecore amplifier. Sleek industrial look with illuminated rings making knobs easy to see and use. Supports the JBL CSR-V wall controller via Ethernet cable. Universal power supply.



CSA180Z	JBL1598	RRP: £695.00
---------	---------	--------------

CSA 1120Z

1 output channel with 120W output. Built-in 70V and 100V. Fanless, space-saving 1U design. Sleep mode disable function. Energy-efficient Drivecore amplifier. Sleek industrial look with illuminated rings making knobs easy to see and use. Supports the JBL CSR-V wall controller via Ethernet cable. Universal power supply.




CSA1120Z	JBL1599	RRP: £825.00
----------	---------	--------------


CSA 240Z


2 output channels with 40W output. Built-in 70V and 100V. Fanless, space-saving 1U design. Sleep mode disable function. Energy-efficient Drivecore amplifier. Sleek industrial look with illuminated rings making knobs easy to see and use. Supports the JBL CSR-V wall controller via Ethernet cable. Universal power supply.




CSA240Z	JBL1600	RRP: £695.00
---------	---------	--------------


CSA 2120Z		
<p>2 output channels with 120W output. Built-in 70V and 100V. Fanless, space-saving 1U design. Sleep mode disable function. Energy-efficient Drivecore amplifier. Sleek industrial look with illuminated rings making knobs easy to see and use. Supports the JBL CSR-V wall controller via Ethernet cable. Universal power supply.</p>		
		
CSA2120Z	JBL1602	RRP: £1,080.00


CSA 280Z		
<p>2 output channels with 80W output. Built-in 70V and 100V. Fanless, space-saving 1U design. Sleep mode disable function. Energy-efficient Drivecore amplifier. Sleek industrial look with illuminated rings making knobs easy to see and use. Supports the JBL CSR-V wall controller via Ethernet cable. Universal power supply.</p>		
		
CSA280Z	JBL1601	RRP: £885.00


CSA 1300Z		
		
<p>Single channel commercial amplifier. 300w output. Built in 70/100V transformer. Space saving 2U design. Sleep mode disable function. Sleek industrial look with illuminated rings making knobs easy to see and use. Supports JBL CSR-V wall controller via CAT5 cable with RJ45 connectors.</p>		
CSA1300Z	JBL1778	RRP: £900.00

CSA 2300Z		
		
<p>Two channel commercial amplifier. 2x 300w output. Built in 70/100V transformer. Space saving 2U design. Sleep mode disable function. Sleek industrial look with illuminated rings making knobs easy to see and use. Supports JBL CSR-V wall controller via CAT5 cable with RJ45 connectors.</p>		
CSA2300Z	JBL1779	RRP: £1,155.00


CS Series Controllers


CSR V		
<p>Remote volume controller for the CSM processors. Connection is via Cat5 cable with universally accepted RJ45 connectors with a maximum cable length of 1000ft. Mounts in a standard light switch wallbox. Available in black or white.</p>		
		
CSR-V-WHT	JBL1138	RRP: £110.00
CSR-V-BLK	JBL1139	RRP: £110.00


CSR 2SV		
<p>Remote volume and source controller for the CSM-21 processor. Connection is via Cat5 cable with universally accepted RJ45 connectors with a maximum cable length of 1000ft. Mounts in a standard light switch wallbox. Available in black or white.</p>		
		
CSR-2SV-BLK	JBL1141	RRP: £110.00
CSR-2SV-WHT	JBL1140	RRP: £110.00

CSR 3SV		
<p>Remote volume and source controller for the CSM-32 processor. Connection is via Cat5 cable with universally accepted RJ45 connectors with a maximum cable length of 1000ft. Mounts in a standard light switch wallbox. Available in black or white.</p>		
		
CSR-3SV-BLK	JBL1143	RRP: £110.00
CSR3-SV-WHT	JBL1142	RRP: £110.00


CS Series Loudspeakers


CSS-1S/T		
<p>CSS-1S/T is a versatile, compact two-way loudspeaker designed for use on 100V or 70V distributed speaker lines, or in 8 ohm direct mode.</p>		
		
CSS-1S/T	JBL1147	RRP: £205.00

CSS8004		
The CSS8004 is a 100mm (4 in) speaker with 90 dB sensitivity and a 5-Watt multi tap transformer. The speaker's triple-voltage transformer provides versatility by allowing use on 100V, 70V, or 25V distributed loudspeaker lines.		
		
CSS 8004	JBL1098	RRP: £30.00


CSS8008		
The CSS8008 is a 200mm (8 in) speaker with 96 dB sensitivity and a 5-Watt multi tap transformer. The speaker's triple-voltage transformer provides versatility by allowing use on 100V, 70V, or 25V distributed loudspeaker lines.		
		
CSS8008	JBL1099	RRP: £40.00


CS Loudspeaker Accessories


CSS-BB4		
Comes in packs of 6 pcs CSS-BB4x6, for 6 speakers.		
		
CSS-BB4	JBL1101	RRP: £95.00


CSS-BB8		
Pre-install backcan for use with CSS8008 or CSS8018 speaker - 6 Pack		
		
CSS-BB8	JBL1102	RRP: £150.00

EN54 Compliant Speakers

CSS-15C-VA		
Full-range, EN54-24 certified ceiling speaker. 5" full-range dual-cone driver, torsion-mounted into an included easy-install blind-mount metal fire dome. The speaker is designed to provide clear and intelligible sound for applications requiring EN54 certification and/or BS5839 compliance. 6W, 3W and 1.5W multi-tap transformer for use on 100V distributed speaker lines. Frequency range (-10dB) 180Hz – 20kHz. 120° conical coverage.		
		
CSS-15C-VA	JBL1715	RRP: £90.00

Control 12C-VA		
Control 12C-VA is a full-range, EN54-24 certified ceiling speaker consisting of a 3" full-range driver mounted in a vented, paintable baffle made of UV resistant UL94-V0 and UL94-5VB flammability-rated material, with a pre-attached blind-mount back-can for quick and easy installation. Combined 70V/100V and low impedance direct operation. 20 Watts at 8 nominal setting. 15W multi-tap at 70V/100V. 68Hz – 70kHz bandwidth with 130° coverage.		
		
CONTROL 12C-VA	JBL1712	RRP: £135.00

Control 14C-VA		
Control 14C-VA is a full-range, EN54-24 certified ceiling speaker consisting of a 100 mm (4 inch) high tech cone driver and a 19 mm soft-dome liquid cooled tweeter mounted in a vented, paintable baffle made of UV resistant UL94-V0 and UL94-5VB flammability-rated material, with a pre-attached blind-mount back-can for quick and easy installation. Combined 70V/100V and low impedance direct operation. 30 Watts at 8 nominal setting. 25W multi-tap at 70V/100V. 74Hz – 20 kHz bandwidth with 120° coverage.		
		
CONTROL 14C-VA	JBL1713	RRP: £185.00

Control 16C-VA		
Control 16C-VA is a full-range, EN54-24 certified ceiling speaker consisting of a 6.5" high tech cone driver and a 19 mm soft-dome liquid cooled tweeter mounted in a vented, paintable baffle made of UV resistant UL94-V0 and UL94-5VB flammability-rated material, with a pre-attached blind-mount back-can for quick and easy installation. Combined 70V/100V and low impedance direct operation. 50 Watts at 8 nominal setting. 30W multi-tap at 70V/100V. 62Hz – 20 kHz bandwidth with 110° coverage.		
		
CONTROL 16C-VA	JBL1714	RRP: £235.00

Control 25AV-LS

Compact Indoor Outdoor Background Foreground Loudspeaker for Life Safety Applications. The Control@ 25AV-LS built on the same platform as our popular Control 25AV and is UL 1480 UUMW Listed for use in fire alarm and/or emergency communication systems. This loudspeaker is EN 54-24 Compliant for life safety applications.



Control 25AV-LS	JBL0934	RRP: £365.00
Control 25AV-LS-WH	JBL0935	RRP: £365.00

CBT 50LA-LS

Line Array Column Loudspeaker with with Eight 50 mm (2 in) Drivers and EN54:24 Certification. The CBT 50LA-LS, with Constant Beam width Technology™, represents a breakthrough in pattern control, utilising analog delay beam forming and amplitude tapering to accomplish consistent vertical coverage without the narrow vertical beaming and out-of-coverage lobing that are typical of straight form-factor passive column speakers.



CBT 50LA-LS	JBL1619	RRP: £880.00
CBT 50LA-LS-WH	JBL1394	RRP: £880.00

CBT100LA-LS

Line Array Column Loudspeaker with with Sixteen 50 mm (2 in) Drivers and EN54:24 Certification. The CBT 100LA-LS, with Constant Beam width Technology™, represents a breakthrough in pattern control consistency, utilising complex analog delay beam-forming and amplitude tapering to accomplish superior, consistent vertical coverage without the narrow vertical beaming and out-of-coverage lobing that are typical of straight form-factor column speakers.



CBT 100LA-LS-WH	JBL1642	RRP: £1,665.00
CBT 100LA-LS	JBL1710	RRP: £1,665.00

Intellivox V90 MkII

The JBL Intellivox ADC (Analogue Directivity Control) Mark II range is intended for use in 70V/100V Public Address and Voice Alarm (PA/VA) systems. As with other Intellivox products the ADC range has been designed to maximise listening comfort and provide highly intelligible speech reproduction even within difficult reverberant spaces.



Intellivox V-90 MKII, Ral 9010 IVX-577125	JBL1526	RRP: £1,865.00
Intellivox V-90 MKII, Special colour IVX-577135	JBL1528	RRP: £2,265.00

Intellivox H90 MkII



The JBL Intellivox ADC (Analogue Directivity Control) Mark II range is intended for use in 70V/100V Public Address and Voice Alarm (PA/VA) systems. As with other Intellivox products the ADC range has been designed to maximise listening comfort and provide highly intelligible speech reproduction even within difficult reverberant spaces. EN54-24 compliant.

Intellivox H-90 MKII Symmetric Directivity Control, Ral 9010 IVX-577126	JBL1527	RRP: £1,955.00
---	---------	----------------

AW295-LS

EN54-24 certified version of the AW295. 400W power rating (100 hours). Frequency response ±3dB: 102Hz – 18kHz. Available in grey or black.

AW295-LS	JBL1396	RRP: £5,435.00
----------	---------	----------------

AW526-LS

EN54-certified version of the AW526. 400W power rating (100 hours). Frequency response ±3dB: 86Hz – 17kHz. Available in grey or black.

AW526-LS	JBL1707	RRP: £5,880.00
AW526-LS-BK	JBL1398	RRP: £5,880.00

AW566-LS

EN54-certified version of the AW566. 400W power rating (100 hours). Frequency response ±3dB: 88Hz – 19kHz. Available in grey or black.

AW566-LS	JBL1708	RRP: £5,880.00
AW566-LS-BK	JBL1399	RRP: £5,880.00


AW595-LS


EN54-certified version of the AW595. 400W power rating (100 hours). Frequency response ±3dB: 88Hz – 19kHz. Available in grey or black.

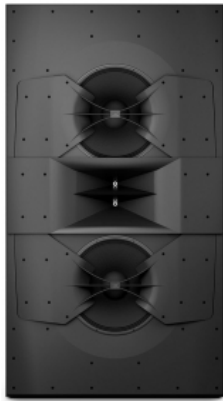
AW595-LS	JBL1400	RRP: £5,880.00
AW595-LS-BK	JBL1401	RRP: £5,880.00


Cinema Sound 200 Series

The 200 Series combines JBL's latest technological advances with a compact footprint and accessible price point, making it easy to upgrade the sonic experience in your small or mid-sized cinema. Featuring patent-pending Dual Dissimilar Arraying and Acoustic Aperture Technology, the JBL 200 series provides remarkably uniform coverage and smooth, accurate sound reproduction for every member of your audience. Models range from 12-14" thin, perfect for small and medium multiplexes with space constraints. And since the 200 Series uses the same driver technology trusted by top movie studios around the world, your audience will enjoy a more captivating, authentic experience from every seat in the house—just like the creators intended.


C211		
Two-way ScreenArray® cinema loudspeaker. Combines JBL's latest technological advances with a compact footprint and accessible price point, making it easy to upgrade the sonic experience in small or mid-sized cinemas. Next-generation two-way ScreenArray® design for maximum output, improved coverage and minimum distortion. C211 2409H uses same HF driver as 7 Series master reference studio monitors. 12" footprint saves space without sacrificing performance. Advanced passive crossover network combined with leading edge DSP in the amplifier produce highly accurate playback and response. Designed for small cinemas and VIP rooms for a maximum throw of 16m. AES power rating 350W. Max Cont SPL 126dB.		
C211	JBL1817	RRP: £665.00


C221		
Two-way ScreenArray® cinema loudspeaker. Patent-pending Dual Dissimilar Arraying Technology creates coverage pattern for raked seating areas, and extends HF output power and pattern control a full octave in both spectrum extremes. Patent-pending Acoustic Aperture Technology delivers improved drivers for lower distortion and higher sensitivity, plus enhanced mid-range performance for a smooth crossover transition. 12" footprint saves space without sacrificing performance. Designed for small and medium sized cinemas with a maximum throw distance of 18m. AES power rating 350W. Max Cont SPL 126dB.		
C221	JBL1818	RRP: £1,160.00

C222			
Two-way ScreenArray® cinema loudspeaker. Patent-pending Dual Dissimilar Arraying Technology creates coverage pattern for raked seating areas, and extends HF output power and pattern control a full octave in both spectrum extremes. Patent-pending Acoustic Aperture Technology delivers improved drivers for lower distortion and higher sensitivity, plus enhanced mid-range performance for a smooth crossover transition. 12" footprint saves space without sacrificing performance. Designed for small and medium sized cinemas with a maximum throw distance of 25m. AES power rating 600W. Max Cont SPL 129dB. Bought as two components - C222-TOP & C222-BOT.			
C222-TOP	JBL1861	RRP: £900.00	
C222-BOT	JBL1819	RRP: £490.00	

C222HP			
Bi-amp, high power version of the C222. Designed to achieve a maximum throw of 35 m. Designed for medium sized cinemas, studios, and dubbing stages. The unique 2-way design that includes the Acoustic Aperture allows for a smooth response through crossover frequencies AES power rating 300W HF / 1200W LF. Max Continuous SPL 135dB.			
C222HP-TOP	JBL1891	RRP: £1,425.00	
C222HP-BOT	JBL1890	RRP: £890.00	

Three-Way ScreenArray Series

4732 (T)			
The 4732 ScreenArray features true three-way system design enhanced for critical film sound reproduction in medium to large cinema environments. The system comes as a bi-amplified (4732) or tri-amplified (4732-T) solution. The latter is THX approved.			
4732-M/HF	JBL0854	RRP: £2,315.00	
4732-M/HF-T	JBL0855	RRP: £2,315.00	
4739	JBL0847	RRP: £1,145.00	

3730			
The 3730 ScreenArray provides smooth and accurate reproduction of cinema soundtracks in a compact and very cost effective system. Bi-amplified or fully passive operation. Shallow profile. Second generation Optimised Aperture Waveguide. Consists of the 3730-M/HF and 3739 components.			
3730-M/HF	JBL1169	RRP: £875.00	
3739	JBL0846	RRP: £845.00	

3731 (T)

Three-way bi-amplified or tri-amplified (T) Screenarray loudspeaker system. 3731T is THX-certified. One 15" Vented Gap Cooled LF transducer. Second generation optimised Aperture Waveguide technology for ultra-low distortion and extremely uniform frequency response. SSC Screen Spreading Compensation. Focussed Coverage Technology. Flat fronted waveguide design for easy baffle wall installation. Low profile design with 600W LF, 150W M/HF. System components are 3732-M/HF (T) and 5651 LF. Both a



3732-M/HF	JBL0850	RRP: £1,815.00
3732-M/HF-T	JBL0851	RRP: £1,815.00
5641	JBL0415	RRP: £880.00

3732 (T)

The 3732 ScreenArray features true three-way system design enhanced for critical film sound reproduction in small to medium cinemas environments. The system comes as a bi-amplified (3732) or tri-amplified (3732-T) solution. The latter is THX approved.



3732-M/HF	JBL0850	RRP: £1,815.00
3732-M/HF-T	JBL0851	RRP: £1,815.00
3739	JBL0846	RRP: £845.00

3733

Three-way loudspeaker system for or critical sound reproduction in cinemas utilising a solid screen. Bi-amp configuration only. Design utilises Dual Dissimilar Arraying technology to improve high frequency coverage and to shape the pattern for raked seating room design. Advance waveguide design for improved frequency response and higher output with lower distortion. Used in conjunction with CRF2 reflector horns, which are used to reflect high frequency content off a solid screen. System comprises of the 3733-M/HF and 4739 LF.



3733-M/HF	JBL1921	RRP: £2,400.00
4739	JBL0847	RRP: £1,145.00

CRF2

Reflector Horn for cinema loudspeakers. Dual Dissimilar Arraying coverage pattern for better high frequency coverage. Same HF driver as the 3733. Same mounting design as the 9300/9310 Surrounds. Sold in Left/Right pairs. Horn design includes a 30 degree angle which allows for a flush mount design (see polar plot for additional information). Designed to be used with the 2520 mounting bracket.



CRF2	JBL1878	RRP: £3,560.00
------	---------	----------------

DSi Series 2.0 Cinema Amplifiers

Next-Generation Amplifiers for JBL Cinema Loudspeakers

DSi Series 2.0



The DSi 2.0 amplifier family, JBL's first line of dedicated cinema amplifiers, builds on Crown DSI Digital Screen Array amplifier technology, integrating best-in-class DSP from Crown's flagship CDi DriveCore series to deliver potent, cost-effective amplification for JBL's entire range of cinema loudspeakers. Choose from three power configurations, available in analog and analog-plus-digital "D" versions featuring Dante/AES67 connectivity.

SA4	JBL1897	RRP: £1,745.00
SA4-D	JBL1896	RRP: £2,050.00
MA4	JBL1895	RRP: £2,615.00
MA4-D	JBL1894	RRP: £2,920.00
LA4	JBL1893	RRP: £2,965.00
LA4-D	JBL1892	RRP: £3,270.00

CPi2000 Cinema Processor

CPi2000



CPi2000 is a professional-grade processor developed by JBL to provide audio enhancement and volume control for cinemas. It features DSP processing, room EQ tuning, volume control and system fault detection and can be configured through a tailor-designed GUI software. Built-in Crossover: Converts up to 7.1 channel audio to passive, bi-amp or tri-amp. Supports TMS Communication. Includes JBL Cinema Speaker Presets.


CPi2000	JBL1879	RRP: £2,095.00
---------	---------	----------------


Ultra-High Power Large Format ScreenArray

5742		
<p>The 5742 quad amplified system features true 4-way design with a quad midrange array of four 8" Differential Drive cone drivers providing 1400W of smooth coverage coupled with a 1600W dual 18" LF section. Frequency response 30Hz- 19kHz ±3dB. Coverage angles 90° H x 20° up/30° down V. Max peak output 136dB @ 1m. Directivity Factor: 10.0. Directivity Index: 10. System consists of 5742-M/HF and 5749.</p>		
		
5742-M/HF	JBL1127	RRP: £3,025.00
5749	JBL1266	RRP: £2,135.00


5732		
<p>The 5732 tri-amplified system is ideal for premier cinemas and post production facilities requiring enhanced power and headroom. The 4732 features a powerful 700W midrange section with dual 8" Differential Drive transducers. The LF section provides 1200W of power from dual 15" vented gap cooled drivers. Frequency response 40Hz-19kHz ±3dB. Coverage angles 90° H x 20° up/30° down V. Max peak output 128dB @ 1m. Directivity Factor: 10.0. Directivity Index: 10. System consists of 5732-M/HF and 5739</p>		
		
5732-M/HF	JBL1261	RRP: £2,315.00
5739	JBL1262	RRP: £1,465.00

Two-Way ScreenArray Series


3722/3722N		
<p>Dual 15" two-way bi-amplified cinema loudspeaker system. The 3722 provides smooth an accurate reproduction of cinema soundtracks in a compact and very cost-effective system. The system comprises of two parts: the 3722-HF high frequency pack and the 3739 low-frequency system. Also available with a passive crossover network (3722N)</p>		
		
3722-HF	JBL0848	RRP: £400.00
3722N-HF	JBL0849	RRP: £410.00
20	JBL0846	RRP: £845.00


4722/4722N		
<p>The 4722 provides smooth and accurate reproduction of cinema soundtracks in a compact and very cost effective system. The system is comprised of two parts: the 4722-HF high-frequency pack and the 4739 low-frequency system. A passive crossover version (4722N) is also available. Peak SPL of 130dB.</p>		
		
4722-HF	JBL0853	RRP: £665.00
4722N-HF	JBL0852	RRP: £665.00
4739	JBL0847	RRP: £1,145.00

JBL Standard Cinema Systems


3677		
<p>The 3677 combines classic JBL performance with natural sound quality for both music and dialogue. The ideal small system when minimum depth behind the screen is required. Requires no field assembly. 15" LF driver. 1.75" titanium HF driver with 1" throat. 90°x40° bi-radial horn. Passive crossover network. Power capacity 250W continuous, 8 ohms. Sensitivity 99dB SPL. Frequency response 45Hz-12kHz ±3dB.</p>		
		
3677	JBL0375	RRP: £1,010.00


Subwoofer Systems

4641		
<p>Single 2241H 18" long excursion subwoofer. Shallow profile. Frequency range 25Hz-500Hz. Power capacity 600W continuous, 8 ohms. Usable response to 25 Hz (-10 dB, no EQ), flat to 25 Hz (-3 dB) with external EQ. THX® approved.</p>		
		
4641	JBL0396	RRP: £890.00


4642A		
<p>Dual 18" subwoofer. 2x 2241H drivers. Shallow profile. Frequency range 22Hz-500Hz. Power capacity 1200W continuous, 4 ohms. THX® approved. Also available with grilles (4642A-GS)</p>		
		
4642AD	JBL0397	RRP: £1,780.00


4642A-GS		
Dual 18" subwoofer. 2x 2241H drivers. Shallow profile. Frequency range 22Hz-500Hz. Power capacity 1200W continuous, 4 ohms. THX® approved. With grilles.	Image Not Available	
4642A-GS	JBL0398	RRP: £2,425.00


4645C		
18" subwoofer. 1x 2241H driver. Frequency range 22Hz-500Hz. Power capacity 1600W continuous, 8 ohms. Usable response to 22 Hz (-10 dB, no EQ), flat to 22 Hz (-3 dB) with external EQ. THX® approved.		
4645C	JBL0399	RRP: £1,290.00


5628		
The 5628 is a high power, lightweight front-loaded vented subwoofer enclosure housing two of JBL's exclusive 2269H Ultra Long Excursion 18" Differential Drive® woofers. This woofer features neodymium magnet, dual voice coils and dual gaps, JBL's exclusive Vented Gap Cooling™ and ultra robust composite cone for high excursion and extra long life. Woofer is capable of a peak-to-peak maximum excursion of 89 mm (3.5").		
5628	JBL1641	RRP: £2,935.00


Cinema Surround


9350		
High output, high-impact cinema surround loudspeaker with configurable pattern. Three-way, 15" design. Configurable vertical and horizontal coverage angles based on whether the surround is located on the rear or side wall location. 350W power rating. Max SPL 130dB continuous (133dB peak). 70/120 degree horizontal coverage. 10 degree downward firing angle.		
9350	JBL1731	RRP: £1,250.00


9320		
12" High power cinema surround for multi-channel applications which offers very high power handling, high sensitivity, and extended bass response. 35Hz- 20kHz frequency range. Sensitivity 98dB SPL (1W, 1m). 400W continuous pink noise power rating, max SPL 124dB @ 1m. 8 Ohms. 120° x 60° coverage angles. Nominal 15° downward firing angle when flush mounted.		
9320	JBL1370	RRP: £760.00

9310		
High power cinema surround loudspeaker. 2-way passive with 1" HF driver and 10" LF driver. 350W power handling. Wave Shaping Vane distributes an acoustic energy wave-front sculpted to the room. High Frequency Horn features JBL Image Control Technology for precise pattern control. Maximum SPL 124 dB continuous, 130 dB peak.		
9310	JBL1719	RRP: £510.00




9300		
High power cinema surround loudspeaker. 2-way passive with 1" HF driver and 10" LF driver. 250W power handling. Wave Shaping Vane distributes an acoustic energy wave-front sculpted to the room. High Frequency Horn features JBL Image Control Technology for precise pattern control. Maximum SPL 120 dB continuous, 126 dB peak.		
9300	JBL1718	RRP: £395.00

8320		
Compact two-way cinema surround speaker for digital applications. 8" LF driver, 1" HF driver. 150W continuous power handling. 50Hz-20kHz frequency range. Uses Quickmount, Omnimount or APC Multimount brackets. 20° angled front baffle. THX® approved.		
8320	JBL0330	RRP: £275.00

SCS12		
The SCS12 is a coaxial-driver, 2-way, full-range cinema surround loudspeaker ideal for multi-channel surround formats and is designed for overhead installation as well as for standard on-wall installations. 12" LF driver and 1" HF compression driver. 90°x90° broadband pattern control. Power rating 400W cont. Frequency response 70Hz-20kHz (±3dB). Heavy duty U-type mounting bracket included.		
SCS12	JBL1334	RRP: £670.00

SCS 8		
The SCS8 is a coaxial-driver, 2-way, full-range cinema surround loudspeaker ideal for multi-channel surround formats and is designed for overhead installation as well as for standard on-wall installations. 8" LF driver and 1" HF compression driver. 120°x120° broadband pattern control. Power rating 250W cont. Frequency response 90Hz-20kHz (±3dB). Heavy duty U-type mounting bracket included.		
SCS8	JBL1335	RRP: £445.00

Accessories

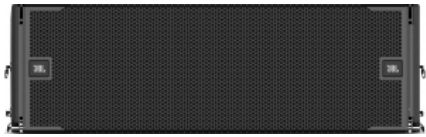

MTU-9320		
The MTU-9320 U-bracket is designed to mount and aim the speaker, to walls, decks, ceilings and under balconies.		
MTU-9320	JBL1622	RRP: £60.00
2516BRK		
Quick mount fixed angle bracket for 8320A and 8340A and 8350 surrounds. Priced individually, sold as pairs.		
2516BRK	JBL0519	RRP: £40.00
2520 Bracket		
Quick Mount Surround Bracket for 9300 Series Surrounds		
2520	JBL1765	RRP: £45.00

Tour Sound


VTX A Series


VTX A12


JBL VTX A12 is a complete tour sound solution for mid- to large-size touring applications and high-end fixed installations. VTX A12 was designed from scratch to address the unique challenges of rental companies, FOH engineers and tour sound production crews. Next-generation JBL transducer technology and a high-frequency waveguide design deliver unmatched performance, sensitivity and coverage. A patented JBL rigging mechanism and redesigned suspension system streamline deployment and setup. And refinements to the physical design maximize reliability and versatility, while minimizing size and dramatically reducing weight. VTX A12 isn't just a superior line array—it's a completely new way to approach tour sound.

VTX A12		
		
Dual 12" line array loudspeaker. New and improved JBL transducers for the best output per weight. Innovative HF section integrates the phasing plug and waveguide for high sensitivity and linearity even at high output levels. Redesigned Radiation Boundary Integrator® (RBI) for reduced horn edge diffraction, improved LF sensitivity, lower distortion, and 90-degree coverage down to 250 Hz. Next Generation LF section, including dual 12" Differential Drive woofers, with a dual magnet, dual voice-coil design for extended linear excursion. Four 5.5" mid-frequency drivers. New HF section features three uniquely designed drivers that combine the HF phasing-plug and waveguide into one part. Best-in-class rigging for streamlined, rapid deployment. Full-face grill for superior weatherization and refined aesthetics. Full integration with JBL system control and prediction software. Lightweight design.		
VTX A12	JBL1812	RRP: £11,400.00
VTX A12W		
		
Wide-angle version of the VTX A12, with 120 degree horizontal coverage pattern to 250Hz. Fully compatible with the VTX A12 and accessories.		
VTX A12W	JBL1847	RRP: £11,400.00


Accessories

VTX A12 AF		
Lightweight array frame for supporting up to 24 VTX A12 cabinets. Designed to operate in either single-point, front-to-back or side-by-side suspension modes using the VTX A12 AF EB Extension Bar. Three connection points are available for attaching the Extension Bar to the main frame, allowing for precise control of shackle positioning for single-point applications. Support for 3rd party inclinometers is available using the included laser attachment bracket.		
VTX A12 AF	JBL1813	RRP: £4,255.00

VTX A12 VT		
Vertical transport cart for 4 x 12 VTX A12 cabinets. Two attachment points on each side for connecting to the optional VTX A12 Ground Stack outrigger system. Measurements designed to fit european and US trucks. Includes hard-top attachment that connects to the topmost cabinet of a stack to create a robust and defined footprint that stabilises the carts during transportation and allows other gear to be placed above for maximum truck-pack efficiency.		
		
VTX A12 VT	JBL1814	RRP: £1,870.00


VTX A12 VT CVR		
Heavy-duty soft cover for four VTX A12 cabinets on the VTX A12 VT vertical transport.		
		
VTX A12 VT CVR	JBL1815	RRP: £915.00

VTX A12 AF EB		
Extension Bar for use with VTX A12 AF. Single, front-to-back or side-by-side pick point options. 0.5-degree pick point resolution. Includes 3 x shackles and mounting brackets. Lightweight design		
VTX A12 AF EB	JBL1909	RRP: £1,065.00

VTX A12 BP		
Base Plate for VTX A12		
		
VTX A12 BP	JBL1904	RRP: £915.00

VTX A12 SB		
Suspension Bar accessory for VTX A12. Used for pull-back applications. Support for suspending VTX A12. Support for up to 18 x VTX A12 enclosures. Lightweight design		
VTX A12 SB	JBL1910	RRP: £950.00

VTX A8

VTX A8		
		
Line array that delivers JBL Professional's flagship VTX A Series technology in a compact solution for small to mid-size rental and installed applications. Two 8" woofers, four 3.5" midrange drivers and two 2" HF drivers. 110 degree horizontal coverage down to 300Hz. Common HF compression driver across A-Series products provides excellent sonic consistency. Innovative auto-locking rigging mechanism for streamlined, rapid deployment. Full-face, enclosed grille for refined aesthetics and weatherization (IP55). Comprehensive mounting accessories expand configuration options. Integrates seamlessly with JBL system control and prediction software.		
VTX A8	JBL1856	RRP: £5,130.00

Accessories


VTX A8 AF		
Array frame for VTX A8. Support for up to 24 x VTX A8 enclosures. Compatible with VTX A8 and VTX B18. Several pick-point options. 0.5° pick-point resolution. Built-in storage position for extension bar. Includes 1 x VTX A8 AF EB extension bar. Support for 3rd-party laser inclinometers. Compatible shackle size: 5/8"		
VTX A8 AF	JBL1866	RRP: £2,360.00


VTX A8 AF EB		
Extension Bar for use with VTX A8 AF. 0.5° pick-point resolution. Includes 3 x shackles and mounting brackets. Lightweight design. Compatible shackle size: 5/8"		
VTX A8 EB	JBL1870	RRP: £1,370.00

VTX A8 BP		
Base Plate. Used for ground stacking VTX A8. Connects VTX A8 cabinets to subwoofers. Universal M20 attachment method. Range: -15° to +5°. Lightweight design		
VTX A8 BP	JBL1869	RRP: £685.00


VTX A8 VT		
Vertical transport cart for 4 x VTX A8 enclosures. Truck-friendly dimensions. Includes a hard top for easy stacking. Built-in stacking features for easy storage. Lightweight design. Heavy-duty casters		
VTX A8 VT	JBL1867	RRP: £1,370.00

VTX A8 VT CVR		
Heavy-duty soft cover for VTX A8 enclosures. Covers 4 x VTX A8 enclosures on a VTX A8 VT. Includes input-panel flaps for testing purposes. Clear see-through pocket for shipping labels. Handle cut-outs for easy transportation. Folds and stores in the VTX A8 VT. Heavy-duty industrial-grade zippers		
VTX A8 VT CVR	JBL1868	RRP: £760.00


VTX RC500		
Universal truss/pipe clamp adapter		
		
VTX RC500	JBL1873	RRP: £460.00

B28 VT CVR		
Heavy-duty soft cover for VTX B28 stacks		
		
VTX B28 VT CVR	JBL1902	RRP: £760.00


VTX B28

VTX B28		
Arrayable Dual-18-inch Subwoofer. Delivers transparent, linear bass response down to 25 Hz. JBL Differential Drive woofers. Large double-flared port for greater extension and reduced turbulence. Simple 2-point spring-loaded rigging system. FEA-optimized enclosure. Front and rear NL4 connectors. Support for omnidirectional or cardioid modes. Acoustically compatible with all VTX full-range products. Flexible accessory options.		
		
VTX B28	JBL1900	RRP: £6,460.00


VTX B18


VTX B18		
		
Single 18" subwoofer designed to complement VTX full-range sound reinforcement systems. New JBL 2288 transducer offers increased sensitivity, lower distortion and improved linearity. JBL SlipStream™ double-flared exponential ports for reduced noise and air turbulence. Built-in, easy to use, spring-loaded rigging system. Support for omnidirectional and cardioid array configurations. Front and rear NL4 connectors streamline cable management. Channel-selection switch minimises wiring requirements. Mechanically compatible with the VTX A8 and all A8 suspension accessories. Full integration with JBL system prediction and control software. Comprehensive mounting accessories expand configuration options.		
VTX B18	JBL1862	RRP: £3,650.00


Accessories


B28 ACC		
Transportation kit for VTX B28		
		
VTX B28 ACC	JBL1905	RRP: £950.00


Accessories

VTX B18 ACC		
Accessory Cover & Castorboard		
		
VTX B18 ACC	JBL1865	RRP: £800.00


B28 SB		
Versatile suspension bar accessory for B28 subwoofer		
		
VTX B28 SB	JBL1906	RRP: £1,220.00


B18 VT		
Vertical Transporter		
		
VTX B18 VT	JBL1863	RRP: £915.00


B28 VT		
Vertical transport cart for up to four VTX B28 enclosures		
		
VTX B28 VT	JBL1901	RRP: £1,825.00


B18 VT CVR		
Heavy-duty soft cover for VTX B18 enclosures		
VTX B18 VT CVR	JBL1864	RRP: £760.00


VTX V Series

VTX-V25-II		
		
Next generation line array system. The VTX V25 is a full size 3-way high-directivity line array element. The VTX V25 features two 2000W 15" Differential Drive® woofers mounted in die cast aluminium baffles, with four 8" Differential Drive midrange transducers and three of the revolutionary new D2 Dual-Diaphragm Dual-Voice-Coil Compression Drivers mounted on a 3rd generation waveguide and patented RBI – Radiation Boundary Integrator assembly. Patented rigging, Crown VRack DSP and amplification, and JBL HiQnet Performance Manager™ configuration and control software complete the system package. The MKII version has a new, improved waveguide giving better HF response.		
VTX-V25-II	JBL1649	RRP: £14,370.00

VTX-V25-II-CS		
		
The VTX V25-II-CS has the same specifications as the V25-II but uses JBL's Compression ASM suspension system.		
VTX-V25-II-CS	JBL1650	RRP: £15,310.00


VTX-S28		
		
The VTX system subwoofer with two 2269H 18" transducers featuring Differential Drive technology with two voice coils, two neodymium magnets and extremely high peak-to-peak excursion capabilities to deliver extended very low frequency performance. S28 can be suspended or ground-stacked and is cardioid-arrayable in either configuration for improved rear rejection. Compatible with VTX V25 suspension, S28 can be suspended at the top of V25 arrays to extend the effective low frequency line length, providing improved vertical pattern control combined with improved rear rejection when used in cardioid mode.		
VTX-S28	JBL1198	RRP: £7,600.00


VTX-V20		
		
VTX V20 features high power density 3-way system complemented by a new suspension system. All VTX V20 components have been specifically engineered to provide stable 105 degree horizontal coverage and effective line source array coupling in the vertical plane while delivering linear, transparent sound up to surprisingly high output levels for its diminutive size.		
VTX-V20	JBL1389	RRP: £8,890.00


VTX-S25		
The dual 15", cardioid-arrayable S25 subwoofer provides industry-leading very low frequency output and can be integrated with V20 with tremendous versatility, either ground-stacked or suspended in mixed arrays or standalone.		
VTX-S25	JBL1390	RRP: £6,460.00


Accessories

VTX-V25-AF		
Array frame for suspending or ground stacking VTX V25 and or S28 enclosures.		
VTX-V25-AF	JBL1184	RRP: £4,790.00


VTX-V20-VT		
VTX-V20-VT vertical transporter measuring 35" wide by 16" deep		
VTX-V20-VT	JBL1605	RRP: £990.00


VTX-V20-VT-CVR		
Reinforced, padded protective cover for 3x or 4x VTX V20 enclosures when transported vertically.		
VTX-V20-VT-CVR	JBL1606	RRP: £685.00


VTX-V20-AF		
Array Frame used for suspending or ground stacking VTX V20 or VTX S25 enclosures. Includes height-adjustable leveling feet, optional extension bar available.		
VTX-V20-AF	JBL1609	RRP: £3,960.00


VTX-V20-AF-EB		
Extension Bar accessory used in conjunction with the VTX-V20-AF array frame for deploying VTX V20 systems in either compression or tension mode		
VTX-V20-AF-EB	JBL1610	RRP: £1,155.00


VTX-V20-PB		
Pull Back accessory for attachment to bottom V20 enclosure to facilitate compression suspension of VTX V20 arrays.	Image Not Available	
VTX-V20-PB	JBL1611	RRP: £1,130.00


VTX-V20-LH		
CM Lever Hoist (3/4 ton rating) with 20' of chain		
VTX-V20-LH	JBL1636	RRP: £610.00


VTX-V20-VT-CVRW		
Reinforced, padded protective cover for 3x or 4x VTX-V20 enclosures plus VTX-V20-AF array frame when transported vertically		
VTX-V20-VT-CVRW	jbl1809	RRP: £685.00


VTX-S25-VT		
Vertical Transporter for transportation of up to three VTX S25 enclosures in a vertical column in either front-firing or cardioid mode		
VTX-S25-VT	JBL1607	RRP: £760.00


VTX-S25-VT-CVR		
Vertical Transporter Cover for use with VTX-S25-VT. Modular, reconfigurable design allows for protection of two or three VTX S25 enclosures in either front-firing or cardioid mode.		
VTX-S25-VT-CVR	JBL1608	RRP: £840.00


VTX-V25-CS-K		
Compression suspension can be implemented on existing VTX V25 cabinets equipped with the new VTX-V25-CS-K compression suspension kit using VTX-V25-PB Pull Back, VTX-V25-LH Lever Hoist accessories.		
VTX-V25-CS-K	JBL1653	RRP: £635.00


VTX-V25-CS-K-LJ		
Compression Suspension Kit Label Jig to ensure proper placement, alignment and adhesion when installing labels.		
VTX-V25-CS-K-LJ	JBL1654	RRP: £115.00


VTX-V25-PB		
Pull Back accessory for attachment to bottom V25 enclosure to facilitate compression suspension of VTX-V25-CS-K equipped arrays.		
VTX-V25-PB	JBL1656	RRP: £1,195.00


VTX-V25-LH		
Factory-approved manual lever hoist for compression of VTX-V25-CS-K equipped systems		
VTX-V25-LH	JBL1657	RRP: £875.00

VTX-S28-VTC		
The VTX-S28-VTC vertical transporter can accommodate 3x S28 enclosures high in either front-firing or cardioid mode and transporters are dimensioned to fit 2 across (width-wise) in standard 96" trucks.		
VTX-S28-VTC	JBL1652	RRP: £1,505.00

VTX-V25-VTC		
With design features similar to VTX-V20-VT, the VTX-V25-VTC is a simple and cost-effective solution for vertically transporting VTX V25-CS enclosures in blocks of 3 or 4 cabinets high		
VTX-V25-VTC	JBL1651	RRP: £1,345.00


VTX-S28-VT-CVR		
Reinforced, padded protective cover for 3 VTX-S28 enclosures when transported vertically in either front-firing or cardioid mode.		
VTX-S28-VT-CVR	JBL1643	RRP: £1,105.00


VTX-V25-AF-EB		
Extension Bar accessory used in conjunction with the VTX-V25-AF array frame for deploying VTX V25 series systems in either compression or tension mode		
VTX-V25-AF-EB	JBL1615	RRP: £1,485.00

VTX-S28-ACC		
VTX Series S28 Accessory Kit for transportation and protection of one VTX S28 enclosure		
VTX-S28_ACC	JBL1199	RRP: £1,295.00


VTX-V25-ACC		
Accessory kit for VTX V25. Dolly/wheelboard and padded protective cover for one VTX V25.		
VTX-V25-ACC	JBL1183	RRP: £1,105.00


VTX-M Series


VTX M20		
Dual 10" stage monitor. High performance differential drive woofers and the large-format D2 dual-diaphragm dual voice-coil high frequency driver. Passive or bi-amp operation with no compromise in output power or performance. 60x60 coverage. Elegant, low profile, compact design suitable for touring and high profile broadcast applications. Max peak output 136dB.		
VTX-M20	JBL1728	RRP: £2,775.00


VTX M22		
Dual 12" stage monitor. High performance differential drive woofers and the large-format D2 dual-diaphragm dual voice-coil high frequency driver. Passive or bi-amp operation with no compromise in output power or performance. 60x60 coverage. Elegant, low profile, compact design suitable for touring and high profile broadcast applications. Max peak output 138dB.		
VTX-M22	JBL1729	RRP: £3,385.00

VTX-F Series


VTX-F12		
12" bi-amplified 2-way system. The VTX F series is a line of multi-purpose loudspeakers designed to give sound production companies a variety of flexible options for deploying high-quality audio, either as a stand-alone FOH system, a satellite and subwoofer system (with companion VTX F18S), or on-stage floor monitor and fill speaker. D2 dual diaphragm driver. Progressive Transition Waveguide (90° x 50°). BSS Audio OmniDriveHD V5 processing. Frequency response 69Hz-20kHz (±3dB). Sensitivity: 9		
VTX-F12	JBL1380	RRP: £1,380.00


VTX-F15		
15" bi-amplified 2-way system. The VTX F series is a line of multi-purpose loudspeakers designed to give sound production companies a variety of flexible options for deploying high-quality audio, either as a stand-alone FOH system, a satellite and subwoofer system (with companion VTX F18S), or on-stage floor monitor and fill speaker. D2 dual diaphragm driver. Progressive Transition Waveguide (90° x 50°). BSS Audio OmniDriveHD V5 processing. Frequency response 59Hz-20kHz (±3dB).		
VTX-F15	JBL1381	RRP: £1,670.00


VTX-F18S		
18" compact subwoofer. 2269H 18" Differential Drive. Attachment plates included as standard for stacked F18S plus F12 or F15 configurations. Massive linear excursion capability (3.5" peak-to-peak). Reverse-cardioid arrayable (front NL4). Frequency response 32.5Hz-1.7kHz (±3dB). Sensitivity: 96dB. Power rating (cont) 2000W.		
VTX-F18S	JBL1382	RRP: £2,280.00


VTX-F35		
15" 3-Way Loudspeaker, designed to address a wide range of applications where high-impact, high-fidelity audio needs to be delivered with the form factor of a trapezoidal full-range system. CSX F35 can be the go-to choice for customers needing high-power side-fills, mains speakers, or a V5-compliant high-performance complement to a larger VTX system. Two 15" LF drivers, one 8" MF driver and one D2 HF driver. Available in 60x40 or 9x50 degree coverage patterns. Frequency range 39Hz - 18kHz. Max peak output 143dB. I-Tech HD system processing. 18mm 11-ply Finnish birch cabinet with black DuraFlex finish and 14 gauge hex perforated steel grille with acoustically transparent cloth backing. Net weight 52kg.		
VTX-F35/64	JBL1730	RRP: £3,415.00
VTX-F35/95	JBL1762	RRP: £3,310.00

SRX900 Series


SRX906LA		
<p>The SRX900 Series embodies the advanced performance principles that drive JBL's development of audio products that make a real difference in the world of professional audio. This next-generation family of powered line arrays and subwoofers addresses the growing need for scalable small and medium-format professional sound-reinforcement solutions for rental companies, fixed installations and musicians seeking the ultimate combination of performance and portability. The SRX906LA is a compact, ...</p>		
SRX906LA		JBL2084


SRX910LA		
<p>The SRX900 Series embodies the advanced performance principles that drive JBL's development of audio products that make a real difference in the world of professional audio. This next-generation family of powered line arrays and subwoofers addresses the growing need for scalable small and medium-format professional sound-reinforcement solutions for rental companies, fixed installations and musicians seeking the ultimate combination of performance and portability. The SRX910LA is a two-way a...</p>		
SRX910LA		JBL2086


SRX918S		
<p>The SRX900 Series embodies the advanced performance principles that drive JBL's development of audio products that make a real difference in the world of professional audio. This next-generation family of powered line arrays and subwoofers addresses the growing need for scalable small and medium-format professional sound-reinforcement solutions for rental companies, fixed installations and musicians seeking the ultimate combination of performance and portability. The SRX918S is a single 18-inch a...</p>		
SRX918S		JBL2085


SRX928S		
<p>The SRX900 Series embodies the advanced performance principles that drive JBL's development of audio products that make a real difference in the world of professional audio. This next-generation family of powered line arrays and subwoofers addresses the growing need for scalable small and medium-format professional sound-reinforcement solutions for rental companies, fixed installations and musicians seeking the ultimate combination of performance and portability. The SRX928S is a dual 18-inch act...</p>		
SRX928S		JBL2087


Accessories


SRX900LA PB		
<p>Pull Back accessory, compatible with all SRX900 LA models.</p>		
SRX900LA PB		JBL2098


SRX900 RC1		
<p>Rain Cover, compatible with all SRX900 models.</p>		
SRX900 RC1		JBL2097


SRX906LA CASE		
<p>Road case for (4) SRX906LA speakers Truck-friendly dimensions Built-in stacking features for easy storage Impact-resistant DuraFlex™ finish Heavy-duty casters</p>		
SRX906LA CASE		JBL2089


SRX906LA AF		
<p>Compact and lightweight design Precision pick-point resolution Two-part collapsible design Support for third-party laser inclinometers Support for up to (16) SRX906LA Compatible shackle size: 1/2 in Includes (1) Spreader Bar (1) Extension Bar (1) 1/2-inch Shackle (1) Laser Bracket and hardware</p>		
SRX906LA AF		JBL2088


SRX906LA BP		
<p>Enables ground stacking SRX906LA arrays Allows attaching arrays to subwoofers Universal M20 threaded pole mount Angle range: -15 degrees to +5 degrees Compatible with VTX PM pole mount adapter Support for up to (6) SRX906LA Includes: (1) Base Plate (1) M20 Thumb Screw</p>		
SRX906LA BP		JBL2090


SRX910LA AF		
<p>Compact and lightweight design Precision pick-point resolution Two-part collapsible design Support for third-party laser inclinometers Maximum Limit: (16) SRX910LA Compatible shackle size: 1/2 in Includes (1) Spreader Bar (1) Extension Bar (1) 1/2-inch Shackle (1) Laser Bracket and Hardware</p>		
SRX910LA AF		JBL2091


SRX910LA VT		
Vertical transport cart for (4) SRX910LA Truck-friendly dimensions Includes a hard top (VT TOP) Built-in stacking features for easy storage Lightweight design Heavy-duty casters Includes (1) SRX910LA VT BOTTOM (1) SRX910LA VT TOP		
SRX910LA VT	JBL2092	RRP: £1,015.00


SRX910LA VT CVR		
Heavy-duty soft cover for SRX910LA enclosures Covers four SRX910LA on a Vertical Transporter Includes input panel flaps for testing purposes Handle cutouts for easy transportation Heavy-duty industrial-grade zippers		
SRX910LA VT CVR	JBL2093	RRP: £315.00

SRX910LA BP		
Enables ground stacking SRX910LA arrays Allows attaching arrays to subwoofers Universal M20 threaded pole mount Angle range: -15 degrees to +5 degrees Support for up to (4) SRX910LA Includes: (1) Base Plate (1) M20 Thumb Screw		
SRX910LA BP	JBL2094	RRP: £780.00


SRX918S CVR		
Heavy-duty soft cover for SRX910LA enclosures Covers four SRX910LA on a Vertical Transporter Includes input panel flaps for testing purposes Handle cutouts for easy transportation Heavy-duty industrial-grade zippers		
SRX918S CVR	JBL2095	RRP: £160.00


SRX928S CVR		
Heavy-duty soft cover for SRX928S subwoofer Handle cutouts for easy transportation Includes folding feature for storage Internally reinforced for grille protection		
SRX928S CVR	JBL2096	RRP: £275.00


ACK1		
Universal caster kit for JBL products Compatible with SRX918S and SRX928S Black housing for discreet look Black polyurethane wheel Anti-rattle features for vibration-free operation Includes: (4) Casters + Installation Hardware		
ACK1	JBL2099	RRP: £85.00


VTX PM		
Universal pole mount adapter Compatible with 35 mm poles Includes M10 comfort grip stud knobs Includes: (1) Pole Mount Adapter (1) M8 x 1.25 Comfort Grip Stud Knob (2) M10 Washers (2) M10 x 1.5 Comfort Grip Stud Knob		
VTX PM	JBL2111	RRP: £100.00


VRX900 Series


VRX928LA		
Lightweight (13kg) two-way constant curvature array system. 8" Differential Drive woofer, two neodymium HF compression drivers. Passive or bi-amp modes. Speakon inputs. Duraflex coated ply cabinet. 35mm dual-angle pole mount & internal rigging hardware. 800W, continuous, 8 ohm. Passive sensitivity 90dB. Max SPL 122dB. Also available in white.		
VRX928LA	JBL0742	RRP: £2,250.00
VRX928LA-WH	JBL0805	RRP: £2,250.00


VRX932LA-1		
Two-way constant curvature array system. 12" Differential Drive woofer, two neodymium HF compression drivers. Passive or bi-amp modes. Speakon inputs. Duraflex coated ply cabinet. 35mm dual-angle pole mount & internal rigging hardware. 800W continuous. Passive sensitivity 95dB max SPL 130dB. Also available in white.		
VRX932LA-1	JBL0609	RRP: £3,490.00
VRX932LA-1WH	JBL0658	RRP: £3,490.00

VRX932LAP		
Powered array system. As 932LA-1 but with built-in JBL/Crown DrivePack DPC2 amplifier module. 875W continuous. Max SPL 136dB.		
VRX932LAP	JBL0755	RRP: £4,340.00

VRX915S		
15" Bass reflex subwoofer. Differential Driver woofer. Passive or bi-amp operation. Duraflex coated 15/18mm ply enclosure. 20mm threaded pole socket. Internal rigging hardware for connecting to VRX928 units. 800W continuous. Passive sensitivity 91dB. Max SPL 126dB. Also available in white.		
VRX915S	JBL0741	RRP: £1,960.00
VRX915S-WH	JBL0806	RRP: £1,960.00

VRX918S		
18" compact subwoofer for use with VRX932 units. 18" Differential Driver woofer. Duraflex coated 18mm ply enclosure. 20mm threaded pole socket. Internal rigging hardware. 800W continuous, 8 ohm. Sensitivity 95dB. Max SPL 130dB. Also available in white.		
		
VRX918S	JBL0623	RRP: £2,125.00
VRX918S-WH	JBL0659	RRP: £2,125.00


VRX918S-P		
Powered subwoofer. Specs as VRX918S but with JBL/Crown DrivePack DPC-2 amplifier. 750/1500W (continuous/peak). Max SPL 126dB.		
		
VRX918SP	JBL0756	RRP: £3,035.00


VRX915M		
Two-way floor monitor. 15" Differential Drive woofer, 4" voice coil compression driver. Passive or bi-amp modes. Duraflex coated ply 30° wedge enclosure. 800W continuous. Passive sensitivity 98dB. 8 ohm. Max SPL 127dB.		
		
VRX915M	JBL0707	RRP: £2,605.00


VRX-SMAF		
Small array frame for VRX928 and VRX915S.		
VRX-SMAF	JBL0740	RRP: £800.00

VRX-AF-II		
Array frame for VRX932 and VRX918S.		
VRX-AF	JBL0610	RRP: £1,330.00

Live Portable Sound ONE Series

EON ONE Compact		
All-in-one battery-powered portable PA with professional-grade mixer. 112 dB output, the highest volume in its class. 8" woofer with LF performance down to 37.5 Hz. Ultralight weighs just 8 kg. Set up quickly and easily using JBL EON ONE Compact Control app presets. Professional effects including EQ, reverb, chorus and delay. 4-channel mixer. Two pro-grade preamps with phantom power, two XLR/TRS combo jacks, one 1/4-inch hi-Z guitar input and one 3.5mm aux input. 8-band output EQ, customisable via presets. Stream music via Bluetooth to up to four EON One Compact units. Operate two EON ONE Compact units in stereo mode. One-touch ducking feature automatically lowers music volume when speech input is detected, ensuring every word is heard clearly. JBL Compact Connect app offers complete control of your P.A. from your iOS or Android smartphone or tablet. Two USB 3.0 ports allow high-speed charging of external devices. Tool-free, swappable battery provides up to 12 hours of playtime. Fast b		
		
EON ONE Compact	JBL1887	RRP: £557.50

IRX ONE		
The JBL IRX ONE All-in-One Column PA features an advanced acoustic package, 3-channel mixer and Bluetooth 5.0 audio streaming – all packed into an incredibly easy-to-use system that can be carried with one hand.		
		
IRX ONE	JBL2141	RRP: £749.17

EON ONE MK2		
The JBL EON ONE MK2 battery-powered column PA packs a class-leading acoustic package, 5-channel digital mixer, dbx and Lexicon DSP, Bluetooth functions and universal app control into a lightweight, portable package that can be carried in one hand.		
		
EON ONE MK2-EK	JBL1940	RRP: £1,154.17

PRX One

The JBL PRX ONE all-in-one powered PA features an acoustically optimized column array featuring a 7-channel digital mixer, a full suite of professional DSP, class-leading audio connectivity, Bluetooth functionality and JBL ProConnect universal app control. Enjoy unmatched power and performance in a sleek, compact package: PRXONE delivers a stunning 130dB of wide, full-bandwidth coverage with consistent front-to-back throw, thanks to its custom-engineered 12-tweeter column array featuring JBL AIM ac...



PRX ONE	JBL1939	RRP: £1,462.50
---------	---------	----------------

IRX100 Series

IRX108BT

Powered 8" portable PA loudspeaker with Bluetooth. Four real-world EQ presets take the guesswork out of optimising sound. dbx AFS Automatic Feedback Suppression stops feedback before it starts. Bluetooth integration allows stereo streaming of music, soundtracks and backing tracks. One-touch ducking automatically lowers music volume when speech input is detected.. Wide frequency response: 54 Hz – 20 kHz. Sensitivity (SPL): 124 dB. Lightweight design:



IRX108BT	JBL1898	RRP: £337.50
----------	---------	--------------

IRX112BT

Powered 12" portable PA loudspeaker with Bluetooth. Four real-world EQ presets take the guesswork out of optimizing sound. dbx AFS Automatic Feedback Suppression stops feedback before it starts. Bluetooth integration allows stereo streaming of music, soundtracks and backing tracks. One-touch ducking automatically lowers music volume when speech input is detected. Wide frequency response: 53 Hz – 20 kHz. Sensitivity (SPL): 127 dB. Lightweight design:



IRX112BT	JBL1899	RRP: £382.50
----------	---------	--------------

IRX115S

Powered 15" woofer with 3" voicecoil generates smooth, detailed, deep LF response. Selectable 80 Hz, 100 Hz and 120 Hz crossover points are optimized for JBL IRX Series loudspeakers. Frequency response: 35 Hz – 147 Hz (-10 dB). Max SPL: 128 dB. Weight: 65.3 pounds. Power rating: 1,300W. I/Os: 2 XLR Combo, 2 XLR out.



IRX115S	JBL1918	RRP: £690.83
---------	---------	--------------

EON700 Series

EON710

The JBL EON710 10-inch loudspeaker, part of JBL's new EON700 Series of powered PAs, brings pro-grade power and unprecedented versatility to portable systems for live sound and installed applications, with class-leading volume and clarity and comprehensive features that make setup and operation a breeze. The EON700 line, which includes the 10-inch EON710, the 12-inch EON712, the 15-inch EON715 powered PA speakers and the 18-inch EON718S subwoofer, delivers superior coverage and stunning fidelity...



EON 710	JBL2067	RRP: £520.83
---------	---------	--------------

EON712

The JBL EON712 12-inch loudspeaker, part of JBL's new EON700 Series of powered PAs, brings pro-grade power and unprecedented versatility to portable systems for live sound and installed applications, with class-leading volume and clarity and comprehensive features that make setup and operation a breeze. The EON700 line, which includes the 10-inch EON710, the 12-inch EON712, the 15-inch EON715 powered PA speakers and the 18-inch EON718S subwoofer, delivers superior coverage and stunn...



EON 712	JBL2068	RRP: £532.50
---------	---------	--------------

EON715

The JBL EON715 15-inch loudspeaker, part of JBL's new EON700 Series of powered PAs, brings pro-grade power and unprecedented versatility to portable systems for live sound and installed applications, with class-leading volume and clarity and comprehensive features that make setup and operation a breeze. The EON700 line, which includes the 10-inch EON710, the 12-inch EON712, the 15-inch EON715 powered PA speakers and the 18-inch EON718S subwoofer, delivers superior coverage and stunning f...



EON 715	JBL2069	RRP: £570.83
---------	---------	--------------

EON718S

The JBL EON718S 18-inch powered subwoofer, part of JBL's new EON700 Series of powered loudspeakers, brings prograde power and versatility to portable PA systems for livesound and installed applications, with class-leading volume and clarity and comprehensive features that make setup and operation a breeze. The EON700 line, which includes the 10-inch EON710, the 12-inch EON712, the 15-inch EON715 powered PA speakers and the 18-inch EON718S subwoofer, delivers superior coverage and stunning fidelity ou...



EON 718	JBL2070	RRP: £904.17
---------	---------	--------------

PRX900 Series

JBL PRX908

This powered two-way 8-inch loudspeaker is built entirely from the ground up to leverage JBL's most advanced acoustic innovations. A next-generation driver system—powered by an ultra-efficient Class D amplifier—delivers clarity and definition at maximum volume, with improved dispersion and smooth low-frequency extension.

NEW



PRX908	JBL2116	RRP: £779.17
--------	---------	--------------

JBL PRX912

This powered two-way 12-inch loudspeaker is built entirely from the ground up to leverage JBL's most advanced acoustic innovations. A next-generation driver system—powered by an ultra-efficient Class D amplifier—delivers clarity and definition at maximum volume, with improved dispersion and smooth low-frequency extension.

NEW



PRX912	JBL2117	RRP: £890.83
--------	---------	--------------

JBL PRX915

This powered two-way 15-inch loudspeaker is built entirely from the ground up to leverage JBL's most advanced acoustic innovations. A next-generation driver system—powered by an ultra-efficient Class D amplifier—delivers clarity and definition at maximum volume, with improved dispersion and smooth low-frequency extension.

NEW



PRX915	JBL2118	RRP: £990.83
--------	---------	--------------

JBL PRX915XLF

This 15-inch powered subwoofer is built from the ground up to leverage JBL's most advanced acoustic innovations. A high-performance driver—powered by an ultra-efficient 2,000-watt Class D amplifier—delivers clear, defined bass with smooth low-frequency extension at maximum volume.

NEW



PRX915XLF	JBL2119	RRP: £1,087.50
-----------	---------	----------------

JBL PRX918XLF

This 18-inch powered subwoofer is built from the ground up to leverage JBL's most advanced acoustic innovations. A next-generation driver—powered by an ultra-efficient Class D amplifier—delivers clear, defined bass with smooth low-frequency extension at maximum volume.

NEW



PRX918XLF	JBL2120	RRP: £1,187.50
-----------	---------	----------------

Accessories

EON ONE Compact

EON ONE Compact USB Power Cable

Connects to EON ONE Compact via USB A, while a 5.5mm power terminal connects to an AKG DMS or WMS system or a DigiTech-DOD guitar pedal. Available in two versions and designed to be used specifically with the EON ONE Compact, AKG wireless systems and DigiTech-DOD guitar pedals, the 9V cable powers AKG DMS systems or pedals, while the 12V version powers AKG WMS systems.



EON ONE Compact DMS Acc Cable	JBL1938	RRP: £15.83
EON ONE Compact 5v to 12v cable	JBL1937	RRP: £15.83

EON ONE Compact Rechargeable Battery

Be prepared for any gig and increase the run time of an EON ONE Compact system with additional EON ONE Compact rechargeable batteries. Each lithium-ion battery provides up to 12 hours of run time per charge for exceptionally long run time capabilities.



EON ONE Compact Battery	JBL1903	RRP: £99.17
-------------------------	---------	-------------

PRX One

PRX One Install Adaptor Bracket Kit

Optional bracket and adapter which allows the PRX One array to be wall or truss-mounted independently of subwoofer for permanent installations.

Image Not Available

PRX One Install Adapter Bracket Kit	JBL2076	RRP: £257.50
-------------------------------------	---------	--------------

EON208P

EON208P



Packaged 8" Two-way PA with powered 8-channel mixer and Bluetooth. Mixer section with four mic/line channels, two stereo line input channels, HiZ input and Bluetooth. On-board reverb. Monitor, subwoofer and headphone outputs. Two two-way speaker cabinets with 8" woofer and 1" neodymium tweeter. Class D amplifier with 300W (2x150W) output. On board DSP limiting. Max output 121dB peak SPL. Frequency range (±3dB) 60Hz - 20kHz. System weights just 17.5kg.

EON208P	JBL1726	RRP: £670.83
---------	---------	--------------

Passive Speakers

PRX400 Series

PRX412M

Portable, 12" two-way speaker system. Frequency range 50Hz-19kHz. Power rating 300W continuous, 1200W peak. System sensitivity 95dB SPL 1w@1m. Max SPL 126dB peak. 8 ohm impedance. 90°x50° coverage for even and smooth response on and off axis. SonicGuard™ HF protection. Dual-angle pole socket. Heavy duty 16 gauge steel grille. 12 M10 suspension points. Tough DuraFlex™ enclosure finish. Also available in white for installation applications.



PRX412M	JBL1178	RRP: £930.00
PRX412M-WH	JBL1325	RRP: £910.00

PRX415M

Portable, 15" two-way speaker system. Frequency range 55Hz-19kHz. Power rating 300W continuous, 1200W peak. System sensitivity 98dB SPL 1w@1m. Max SPL 129dB peak. 8 ohm impedance. 90°x50° coverage for even and smooth response on and off axis. SonicGuard™ HF protection. Dual-angle pole socket. Heavy duty 16 gauge steel grille. Tough DuraFlex™ enclosure finish. Also available in white for installation applications.



PRX415MD	JBL1179	RRP: £940.00
PRX415M-WH	JBL1326	RRP: £910.00

PRX425

Portable, dual 15" two-way speaker system. Frequency range 55Hz-19kHz. Power rating 600W continuous, 2400W peak. System sensitivity 100dB SPL 1w@1m. Max SPL 134dB peak. 4 ohm impedance. 90°x50° coverage for even and smooth response on and off axis. SonicGuard™ HF protection. Dual-angle pole socket. Heavy duty 16 gauge steel grille. Tough DuraFlex™ enclosure finish.



PRX425D	JBL1180	RRP: £1,260.00
---------	---------	----------------

PRX418S

Portable 18" subwoofer. Frequency range 35Hz-300Hz. Power rating 800W continuous, 3200W peak. System sensitivity 95dB SPL 1w@1m. Max SPL 130dB peak. 8 ohm impedance. Heavy duty 16 gauge steel grille. Tough DuraFlex™ enclosure finish.



PRX418S	JBL1181	RRP: £1,260.00
---------	---------	----------------


JRX200 Series


JRX212


Portable, twelve-inch, two-way speaker system designed specifically for live performance. M112-8 12" LF driver. 2414H-C 1" polymer diaphragm compression driver mounted on Progressive Transition™ Waveguide. 90° x 50° dispersion. 129dB max SPL. Power rating 250W continuous, 1000W peak. Sensitivity 99dB (1W, 1m). 8 ohms. Attractive 18-gauge hexagon perforated, steel grille. Dual-angle pole-mount socket.




JRX212	JBL1351	RRP: £237.50
--------	---------	--------------


JRX215		
<p>Portable, 15" two-way speaker system designed specifically for live performance. M115-8A 15" LF driver. 2414H-C 1" polymer diaphragm compression driver mounted on Progressive Transition™ Waveguide. 90° x 50° dispersion. 128dB max SPL. Power rating 250W continuous, 1000W peak. Sensitivity 98dB (1W, 1m). 8 ohms. Attractive 18-gauge hexagon perforated, steel grille. Dual-angle pole-mount socket.</p>		
		
JRX215	JBL1352	RRP: £320.83


JRX225		
<p>Dual, 15" two-way speaker system designed specifically for live performance. M128 15" LF drivers. 2414H-C 1" polymer diaphragm compression driver mounted on Progressive Transition™ Waveguide. 90° x 50° dispersion. 123dB max SPL. Power rating 500W continuous, 2000W peak. Sensitivity 100dB (1W, 1m). 4 ohms. Attractive 18-gauge hexagon perforated, steel grille.</p>		
		
JRX225	JBL1353	RRP: £449.17


JRX218S		
<p>18" subwoofer with cast frame and 3" voice coil. JBL 2043-G driver.. 90° x 50° dispersion. 127dB max SPL. Power rating 350W continuous, 1400W peak. Sensitivity 96dB (1W, 1m). 4 ohms. Attractive 18-gauge perforated steel grille protects components from damage. Top mounted, cast aluminum 35 mm pole mount receptacle.</p>		
		
JRX218S	JBL1354	RRP: £437.50

Stands and Poles

POLE-MA		
<p>Manual Adjust Speaker Pole with M20 Threaded Lower End, 38mm Pole & 35mm.</p>		
		
JBLPOLE-MA	JBL1384	RRP: £90.83


POLE-GA		
<p>Gas Assist Speaker Pole with M20 Threaded Lower End, 38mm Pole & 35mm Adapter.</p>		
		
JBLPOLE-GA	JBL1385	RRP: £140.83


Tripod-MA		
<p>Aluminium Tripod Speaker Stand with Secure Locking Pin and 150 lbs Load Capacity.</p>		
		
JBLTRIPOD-MA	JBL1386	RRP: £90.83

Tripod-GA		
<p>Lift-assist Aluminium Tripod Speaker Stand with Integrated Speaker Adapter.</p>		
		
JBLTRIPOD-GA	JBL1387	RRP: £215.83


Bags and Cases


Backpack for EON ONE COMPACT		
<p>EON-ONE-COMPACT-BP Backpack Style Carrying Case for the EON ONE Compact</p>		
		
Backpack for EON ONE COMPACT	GAT0137	RRP: £130.00

Cover For JBL IRX112BT Loudspeaker		
<p>Speaker Slipcover Designed for JBL IRX112BT Loudspeaker</p>		
		
Cover For JBL IRX112BT Loudspeaker	GAT0144	RRP: £58.33

Cover For JBL IRX108BT Loudspeaker		
Speaker Slipcover Designed for JBL IRX108BT Loudspeaker		
Cover For JBL IRX108BT Loudspeaker	GAT0142	RRP: £53.33


Tote Bag For JBL IRX108BT Loudspeaker		
JBL-IRX108BT-BAG Speaker Tote Bag Designed for JBL IRX108BT Powered 8-Inch Portable PA Loudspeaker with Bluetooth		
Tote Bag For JBL IRX108BT Loudspeaker	GAT0141	RRP: £75.83


Slip On Cover for EON712 Speaker		
Speaker Slipcover Designed for JBL EON 712 Powered 12-Inch Loudspeaker Tough, Water-Resistant 600D Black Polyester Exterior Fabric Soft, 210D Polyester Interior Fabric with 10mm Foam Padding for Protection Top Handle & Side Panel Cutouts with Hook-and-Loop Flap Closures Exterior Dimensions: 17.25"/438mm (L) x 14"/356mm (W) x 26.5"/673mm (H), Net Weight: 1.8 lbs./0.82 kg Interior Dimensions: 16.75"/425mm (L) x 13.5"/343mm (W) x 26"/660mm (H)		
Slip On Cover for EON712 Speaker	GAT1553	RRP: £65.83


Slip On Cover for EON715 Speaker		
Speaker Slipcover Designed for JBL EON 715 Powered 15-Inch Loudspeaker. Tough, Water-Resistant 600D Black Polyester Exterior Fabric Soft, 210D Polyester Interior Fabric with 10mm Foam Padding for Protection Top Handle Cutout with Hook-and-Loop Flap Closure Exterior Dimensions: 20"/508mm (L) x 16"/406mm (W) x 28.5"/724mm (H), Net Weight: 1.8 lbs./0.82 kg Interior Dimensions: 19.5"/495mm (L) x 15.5"/394mm (W) x 28"/711mm (H)		
Slip On Cover for EON715 Speaker	GAT1557	RRP: £78.33

Tote Bag For EON ONE Compact		
JBL-EONONECOMPACT-BAG Speaker Tote Bag Designed for JBL EON ONE COMPACT Portable PA Speaker System		
Tote Bag For Eon One Compact	GAT0138	RRP: £80.83

Tote Bag For JBL IRX112BT Loudspeaker		
JBL-IRX112BT-BAG Speaker Tote Bag Designed for JBL IRX112BT Powered 12-Inch Portable PA Loudspeaker with Bluetooth		
Tote Bag For JBL IRX112BT Loudspeaker	GAT0143	RRP: £85.00

Convertible Cover For Eon One Compact		
JBL-EONONECOMPACT-CVR-WX Convertible Speaker Cover Designed for JBL EON ONE COMPACT Portable PA Speaker System		
Convertible Cover For Eon One Compact	GAT0140	RRP: £55.83

Slip On Cover for EON710 Speaker		
Speaker Slipcover Designed for JBL EON 710 Powered 10-Inch Loudspeaker. Soft, 210D Polyester Interior Fabric with 10mm Foam Padding for Protection Top Handle Cutout with Hook-and-Loop Flap Closure Exterior Dimensions: 14"/357mm (L) x 13"/330mm (W) x 23.5"/597mm (H), Net Weight: 1.2 lbs./0.54 kg Interior Dimensions: 13.5"/343mm (L) x 12.5"/318mm (W) x 23"/584mm (H) Speaker Slipcover Designed for JBL EON 710 Powered 10-Inch Loudspeaker Tough, Water-Resistant 600D Black Polyester ...		
Slip On Cover for EON710 Speaker	GAT1550	RRP: £54.99

Standard Cover For Eon One Compact		
JBL-EONONECOMPACT-CVR Standard Speaker Cover Designed for JBL EON ONE COMPACT Portable PA Speaker System		
Standard Cover For Eon One Compact	GAT0139	RRP: £30.83


Convertible Cover for EON710 Speaker		
<p>Convertible Speaker Cover Designed for JBL EON 710 Powered 10-Inch Loudspeaker. Live-In Design Permits Full Functionality & Access to Controls While Speaker Remains Inside Cover Tough, Water-Resistant 420D Black Polyester Exterior Fabric Soft, 210D Polyester Interior Fabric with 5mm Foam Padding Protection Single Handle & Speaker Fly-Mount Cutouts on Top with Weather-Proof Flaps Roll-Up, Hook-and-Loop Cover Flap Exposes Mesh Speaker Grille & Zippers Down When Not in Use Side Co...</p>		
Convertible Cover for EON710 Speaker	GAT1551	RRP: £62.49


Convertible Cover for EON712 Speaker		
<p>Convertible Speaker Cover Designed for JBL EON 712 Powered 12-Inch Loudspeaker. Live-In Design Permits Full Functionality & Access to Controls While Speaker Remains Inside Cover Tough, Water-Resistant 420D Black Polyester Exterior Fabric Soft, 210D Polyester Interior Fabric with 5mm Foam Padding Protection Single Handle & Speaker Fly-Mount Cutouts on Top with Weather-Proof Flaps Roll-Up, Hook-and-Loop Cover Flap Exposes Mesh Speaker Grille & Zippers Down When Not in Use Side Co...</p>		
Convertible Cover for EON712 Speaker	GAT1554	RRP: £77.49

Convertible Cover for EON715 Speaker		
<p>Convertible Speaker Cover Designed for JBL EON 715 Powered 15-Inch Loudspeaker. Live-In Design Permits Full Functionality & Access to Controls While Speaker Remains Inside Cover Tough, Water-Resistant 420D Black Polyester Exterior Fabric Soft, 210D Polyester Interior Fabric with 5mm Foam Padding Protection Single Handle & Speaker Fly-Mount Cutouts on Top with Weather-Proof Flaps Roll-Up, Hook-and-Loop Cover Flap Exposes Mesh Speaker Grille & Zippers Down When Not in Use Side Co...</p>		
Convertible Cover for EON715 Speaker	GAT1558	RRP: £75.83


Slip On Cover for EON718S Subwoofer		
<p>Speaker Slipcover Designed for JBL EON 718S Powered 18-Inch Subwoofer. Tough, Water-Resistant 600D Black Polyester Exterior Fabric Soft, 210D Polyester Interior Fabric with 10mm Foam Padding for Protection Dual Side Handle Cutouts with Hook-and-Loop Flap Closures Exterior Dimensions: 25.5"/648mm (L) x 24.4"/620mm (W) x 26.4"/671mm (H), Net Weight: 3 lbs./1.4 kg Interior Dimensions: 25"/635mm (L) x 23.9"/607mm (W) x 25.9"/658mm (H)</p>		
Slip On Cover for EON718S Subwoofer	GAT1559	RRP: £130.00

Tote Bag for EON710 Speaker		
<p>Speaker Tote Bag Designed for JBL EON 710 Powered 10-Inch Loudspeaker. Tough, Water-Resistant 600D Black Polyester Exterior Fabric Soft, 420D Polyester Interior Fabric with 10mm Foam Padding Heavy-Duty Dual Zipper System Opens Entire Top of Bag for Easy Loading & Unloading Secure-Wrap Reinforced Dual Handles for Easy Transport Exterior Dimensions: 25"/635mm (L) x 15.5"/394mm (W) x 14"/356mm (H), Net Weight: 2.3 lbs./1.04 kg Interior Dimensions: 24.5"/622mm (L) x 15"/381mm (W)...</p>		
Tote Bag for EON710 Speaker	GAT1549	RRP: £95.00


Tote Bag for EON712 Speaker		
<p>Speaker Tote Bag Designed for JBL EON 712 Powered 12-Inch Loudspeaker. Tough, Water-Resistant 600D Black Polyester Exterior Fabric Soft, 420D Polyester Interior Fabric with 10mm Foam Padding Heavy-Duty Dual Zipper System Opens Entire Top of Bag for Easy Loading & Unloading Secure-Wrap Reinforced Dual Handles for Easy Transport Exterior Dimensions: 30"/762mm (L) x 17.5"/445mm (W) x 15"/381mm (H), Net Weight: 2.8 lbs./1.3 kg Interior Dimensions: 29.5"/749mm (L) x 17"/432mm (W) ...</p>		
Tote Bag for EON712 Speaker	GAT1552	RRP: £110.00


Tote Bag for EON715 Speaker		
<p>Speaker Tote Bag Designed for JBL EON 715 Powered 15-Inch Loudspeaker. Tough, Water-Resistant 600D Black Polyester Exterior Fabric Soft, 420D Polyester Interior Fabric with 10mm Foam Padding Heavy-Duty Dual Zipper System Opens Entire Top of Bag for Easy Loading & Unloading Secure-Wrap Reinforced Dual Handles for Easy Transport Exterior Dimensions: 31"/787mm (L) x 19.5"/495mm (W) x 16"/406mm (H), Net Weight: 3.5 lbs./1.6 kg Interior Dimensions: 30"/762mm (L) x 19"/483mm (W) x ...</p>		
Tote Bag for EON715 Speaker	GAT1555	RRP: £125.00


Tote Bag with Wheels for EON715 Speaker		
<p>Wheeled Speaker Tote Bag Designed for JBL EON 715 Powered 15-Inch Loudspeaker. Tough, Water-Resistant 600D Black Polyester Exterior Fabric Soft, 420D Polyester Interior Fabric with 5mm Foam Padding Large Exterior Storage Pocket for Cables & Accessories Heavy-Duty Dual Zipper System Opens Entire Top of Bag for Easy Loading & Unloading Telescoping Pull Handle & Smooth Inline Skate Wheels for Easy Transport Secure-Wrap Reinforced Dual Handles for Comfortable Carry Exterior Dimens...</p>		
Tote Bag with Wheels for EON715 Speaker	GAT1556	RRP: £240.00

Transporter for EON ONE MK2 Speaker		
Rolling Base Speaker Transporter for JBL EON ONE MKII PA System. Keeps Subwoofer & Accessories Together & Protected During Transport Deluxe Subwoofer Cover with Durable Polyester Exterior & Soft, Tricot Interior Attaches to Caster Board via Buckles 10mm-Thick, Integrated Caster Board & Convenient Tow Handle for Easy Travel Handle Cutout Access with Hook-and-Loop Flap Closure Accessory Pocket on Cover for Storing Cables, Mics, & Similar Accessories Printed JBL® Logo		
Transporter for EON ONE MK2 Speaker	GAT1561	RRP: £135.00


7 Series

LSR705P		
Self-powered reference monitor for critical music recording, film post and broadcast production applications. The JBL 705P leverages the same patent-pending driver technologies and JBL's renowned Image Control Waveguide found in the 708P and the flagship M2, but with a smaller footprint. Integrated dual amplification system with internal floating-point DSP. Comprehensive room EQ and delay controls. Compact enclosures for easy placement and installation. 2-channel Class-D amplifier HF 250W / LF 250W. 192 kHz, 32-bit floating point processing. 12 bands of Room EQ, 8 bands of User EQ. 6 factory presets, 6 user-defined presets. 18 milliseconds of Room Delay, 150 milliseconds of AV Sync Delay. 1 x XLR-1/4" balanced combination analog audio input. 1 x XLR AES3 format digital input with 1 x XLR pass-through output.		
705P	JBL1805	RRP: £1,630.00


LSR708P		
Self-powered reference monitor for critical music recording, film post and broadcast production applications. The 708P leverages new patent-pending driver technologies and JBL's renowned Image Control Waveguide to deliver extraordinary output, stunning detail, an expansive soundstage, and greater accuracy in a broad range of rooms. 708P delivers several times the output of other comparably-sized studio monitors, providing significantly greater dynamic range and greater working distances.		
708P	JBL1806	RRP: £3,255.00

LSR705i		
Two-way monitor designed for next generation multi-channel monitoring in post rooms, broadcast facilities and trucks. JBL's Image Control Waveguide allows seamless crossover and uncoloured response in the critical dialogue range, neutral off-axis response and detailed imaging and coherent transition between screen channels, surrounds and overheads. New 725G 5" high excursion LF driver and 2409H HF driver. Birch ply cabinet with top bottom and rear mounting points. Centralised amplification and processing eliminates the requirement for power source at each speaker location. BSS BLU link Networked Audio for ease interface and reduced system noise. Frequency response -1.5dB 48Hz-23kHz. Max SPL 101 db/1m (107dB peak).		
LSR705i	JBL1639	RRP: £1,140.00


Recording and Broadcast

M2 Master Reference Monitor		
Addressing the growing need for high dynamic range and reference-monitor accuracy in a broad range of studios, JBL has developed the M2 Master Reference Monitor, a2 way floor standing or soffit mountable reference monitor. Using the ultra low distortion JBL D2 dual voice coil compression driver and 2216Nd 15" differential drive woofer, the M2 provides in-room frequency response of 20 Hz to 40 kHz, and an extraordinary 123 dB maximum SPL to meet the demanding music, cinema and broadcast production requirements for impactful dynamic range. The Image Control Waveguide creates a neutral frequency response on and off axis in both planes. The enclosure is constructed of rigid 1" MDF, extensively braced for rock solid stability, with a JBL patented Slipstream port design. Requires one Crown iTech 5000HD power amp per speaker or a BSS Soundweb London processor plus Crown MacroTech MA5000i.		
M2	JBL1324	RRP: £7,083.33


SUB18		
Very high power studio subwoofer, designed to partner the M2 reference monitors or LSR 7 series monitors. Single 18" driver with 4" dual voice coils. In room response below 18Hz. 8 ohm impedance. Sensitivity 92dB @ 1m. Max peak output 137dB SPL. 18mm 11-ply baltic birch cabinet with black lacquer finish. Recommended for use with Crown iTech HD amplification.		
SUB18	JBL1727	RRP: £5,485.00


LSR708i		
<p>Two-way monitor designed for next generation multi-channel monitoring in post rooms, broadcast facilities and trucks. JBL's Image Control Waveguide allows seamless crossover and uncoloured response in the critical dialogue range, neutral off-axis response and detailed imaging and coherent transition between screen channels, surrounds and overheads. New 728G 8" high excursion LF driver and 2409H HF driver. Birch ply cabinet with top bottom and rear mounting points. Centralised amplification and processing eliminates the requirement for power source at each speaker location. BSS BLU link Networked Audio for ease interface and reduced system noise. Frequency response -1.5dB 45Hz-23kHz. Max SPL 108 db/1m (114dB peak).</p>		
LSR708i	JBL1640	RRP: £2,445.00

3 Series MKII


305P MKII		
<p>The next-generation JBL 305P MKII powered studio monitor makes legendary JBL performance available to every studio. With the revolutionary JBL Image Control Waveguide and refined transducers, JBL 305P MKII offers stunning detail, precise imaging, a wide sweet spot and impressive dynamic range that enhances the mix capabilities of any modern workspace. Leveraging patented technologies derived from the JBL 7 Series and M2 Master Reference Monitors and sporting a sleek, modern design, JBL 305P MKII delivers outstanding performance and an enjoyable mix experience at an accessible price.</p>		
305P MKII (EK)	JBL2063	RRP: £140.83

306P MKII		
<p>The next-generation JBL 306P MKII powered studio monitor makes legendary JBL performance available to every studio. With the revolutionary JBL Image Control Waveguide and refined transducers, JBL 306P MKII offers stunning detail, precise imaging, a wide sweet spot and impressive dynamic range that enhances the mix capabilities of any modern workspace. Leveraging patented technologies derived from the JBL 7 Series and M2 Master Reference Monitors and sporting a sleek, modern design, JBL 306P MKII ...</p>		
306P MKII (EK)	JBL2072	RRP: £204.17

308P MKII		
<p>The next-generation JBL 308P MKII powered studio monitor makes legendary JBL performance available to every studio. With the revolutionary JBL Image Control Waveguide and refined transducers, JBL 308P MKII offers stunning detail, precise imaging, a wide sweet spot and impressive dynamic range that enhances the mix capabilities of any modern workspace. Leveraging patented technologies derived from the JBL 7 Series and M2 Master Reference Monitors and sporting a sleek, modern design, JBL 308P MKII delivers outstanding performance and an enjoyable mix experience at an accessible price.</p>		
308P MKII (EK)	JBL2064	RRP: £257.50

LSR310S		
<p>10" powered studio subwoofer. Incorporates JBL's patented Slip Stream™ Port working in concert with a custom 10" down-firing driver and a 200 Watt amplifier to add deep, powerful bass to any studio monitor system. Low frequency extension to 27Hz. Max peak SPL 113dB.</p>		
LSR310S/230	JBL2073	RRP: £415.83

1 Series

JBL 104-BT Reference Monitors		
<p>Compact powered desktop monitor set with Bluetooth. Coaxial 4.5" contoured LF driver with integrated 0.75" soft dome tweeter. Master and extension speaker set. Integrated 60W class D amplifier. Acoustically optimised for desktop placement. 1/4", RCA and Bluetooth inputs allow connection with professional equipment, personal music players, and consumer-level devices. Front panel volume control. Front panel headphone jack with speaker mute feature. Integrated power supply. Available in black or white.</p>		
104SET-BT	JBL1888	RRP: £179.17

Monitor Controllers

Intonato 24



24-channel monitor management tuning system. Precisely calibrates and controls up to 24 speakers configured as stereo, surround or immersive audio systems. Compatible with all professional studio monitors. Input connections for 24 analogue, AES /EBU Inputs and up to 256 channels of networked audio. Software-controlled analogue input sensitivity switches, level indicators and gain trims. Output connections include 24 analogue outputs to powered speakers and power amplifiers; BLU link output allows networked connection to Crown power amplifiers. Volume, Mute, and Dim controls, plus individual speaker Mute and Solo. Automated Speaker Calibration with included microphone. 12 bands of Room EQ, Delay, Level per speaker. Sophisticated subwoofer integration for LFE channels. Control via app or Optional Intonato Remote.

INTONATO 24	JBL1807	RRP: £4,585.00
-------------	---------	----------------

Intonato Remote

In an elegant compact form factor, the optional Intonato Desktop Controller provides live control of the features needed during sessions. Instant recall of user-created Scenes allows down-mix monitoring and monitoring of selected sources via main and alternate speaker systems. The Desktop Controller is connected to Intonato 24 using a single CAT5 cable and powered over Ethernet.



INTONATO DC	JBL1808	RRP: £1,225.00
-------------	---------	----------------